

BOARDS & COMMISSIONS APPLICATION

132 North Elmwood Avenue 330-722-9038 www.medinaoh.org

Application Number	
--------------------	--

	Date of Application	
ΙAΓ	Property Location	
GENERAL	Description of Project	
GE		
	Applicant	
ON	Name	
1AT	Address City State Zip	
ORN	Phone Email	
INF	Property Owner	
ΛCΤ	Name	
CONTACT INFORMATION	Address City State Zip	
S	Phone Email	
TYPE	Planning Commission Site Plan Conditional Zoning Certificate Code or Map Amendment	
	Preliminary Plan Final Plat Conditional Sign (EMC/Shopping Ctr) Cert. of Appr. (TCOV) Other	
APPLICATION	Historic Preservation Board Certificate of Appropriateness Conditional Sign	
PLIC	Board of Zoning Anneals Mariones Anneal	
AP	Board of Zoning Appeals Variance Appeal	
RE	By signing this application, I hereby certify that:	
SIGNATURE	1) The information contained in this application is true and accurate to the best of my knowledge;	
JGN,	 I am authorized to make this application as the property owner of record or I have been authorized to make this application by the property owner of record; 	
_	3) I assume sole responsibility for correspondence regarding this application; and	
CAN	4) I am aware that all application requirements must be submitted prior to the formal acceptance of my application.	
APPLICAN	Signature Jara Barreto DN: C=US, E=jbarreto@oliodevgrp.com, O=OLIO, CN=Jara Barreto Date: 2023.02.16 13:20:41-0500' Date	
USE	Zoning District Fee (See Fee Sheet) \$	
JAL		
OFFICIAL	Meeting Date Check Box when Fee Paid	
0		



P23-06 North Court Urgent Care Redevelopment

Property Owner: Milestone Properties, LLC

Applicant: Jara Barreto

Location: 716 North Court Street

Zoning: C-3 (General Commercial), C-1 (Local Commercial), & R-3 (High-Density Urban Residential)

Request: Site Plan approval to redevelop the site for an urgent care

LOCATION AND SURROUNDING USES

The subject site is composed of two properties encompassing 0.80 acres located on the east side of North Court Street and the west side of North Broadway Street. Adjacent properties contain the following uses and zoning:

 North – Medical Office (C-3) and General Office (R-3)

• East – Veteran Memorial Hall (R-3)

- South Office (C-1 and R-3) and Single-Family Residential (R-3)
- West Office (C-3) and Daycare (C-1)



BACKGROUND & PROPOSED APPLICATION

The existing site has been vacant for an extended period of time and was most recently a restaurant. The applicant is proposing to demolish the existing building on the site and construct a 4,505 sq. ft. urgent care facility. The proposal incorporates a similar layout as the existing site with the building located in the southwest corner of the site and parking and drives on the west, north, and east sides of the property.



DEVELOPMENT STANDARDS

The proposed building is located in the C-3 zoning district. The following table indicates the general development standard requirements:

	Required	Proposed
Minimum Lot Frontage	40 ft.	135 ft.
Minimum Front Setback	0 ft.	2 ft.
Minimum Side Setback	0 ft.	13 ft.
Minimum Rear Setback	30 ft.	78 ft.
Maximum Building Height	40 ft.	24 ft.

The project meets the applicable development standards.

PARKING, ACCESS, AND CIRCULATION

<u>Access and Circulation</u> – The existing site has two access points off of North Court Street and an access point off of North Broadway Street. The proposed site incorporates an access point off of North Court Street and an access point off of North Broadway Street.

Per Section 1145.10(e), access drives have a maximum width of 24 ft. at the right-of-way and 38 ft. at the curb. The access drives meet the maximum drive width requirements.

<u>Required Off-Street Spaces</u> – Offices require a minimum of 1 parking space for every 200 sq. ft., which results in 23 required parking spaces. The site reduces the amount of parking from the existing site and incorporates 27 parking spaces.

<u>Parking Dimensions</u> – Ninety-degree parking spaces must be 9 ft. in width and 19 ft. in length with a 24 ft. wide drive aisle. The proposed site meets this standard.

<u>Parking Location</u> – Design Review Guidelines state that parking, to the extent feasible, shall be located behind the front wall of the building. All proposed parking is located behind the front wall of the building.

<u>Sidewalk</u> – A public sidewalk exists along North Court Street and North Broadway Street and must be maintained or replaced. As required, a private sidewalk connects the office to the public sidewalk.

LANDSCAPING, SCREENING, AND BUFFERING

<u>Parking Lot Landscaping</u> – Landscape features or other visual barriers are required between parking and the right-of-way. Plans show landscaping between parking and the right-of-way.

Interior parking lot landscaping is provided at the required 5 sq. ft. per 100 sq. ft. of parking area.

<u>Buffering and Screening</u> – Landscape features or other visual barriers are required between the site and residential properties to the south. A row of Arborvitae is indicated along the south side of the building, parking lot, and driveway.

<u>Trash Enclosure</u> – A trash enclosure is shown on the south side of the site composed of brown wood fencing. In addition, Arborvitae are shown around the enclosure. Trash enclosures must meet the applicable setback



for accessory structures, which is 20 ft. The trash enclosure is located 15 ft. from the south property line. The applicant has filed a variance to Section 1155.05(a)(1) regarding the trash enclosure setbacks.

ENGINEERING DEPARTMENT COMMENTS

The City of Medina Engineering Department has reviewed the plans and has indicated that stormwater management will need to meet the requirements for redevelopment as determined by the Ohio EPA and driveway aprons must be a minimum of 8 in. thick concrete with fiber reinforcing.

UTILITIES AND STORMWATER

The site has access to public water and sanitary sewer service. Stormwater will be reviewed in detail by the City Engineer, though the total impervious surface on the site will be reduced.

BUILDING ELEVATIONS AND LIGHTING

Architectural plans incorporate a building exterior that is predominately brick with an EIFS below the roofline on the north, east, and west sides of the building. The south side of the building is predominately EIFS, however, landscaping has been provided as a buffer.

Though the majority of the building has a flat roof, the northeast and northwest corners of the building incorporate tower features with pitched roofs. Windows are located on the north, east, and west sides of the building with black metal canopies above.

Plans indicate freestanding parking lot lights incorporating a full cut-off fixture and a compliant photometric plan. Lighting height is compliant at 25 ft.

SITE PLAN REVIEW STANDARDS

The Planning Commission's review and action shall be based on the following Standards per Section 1109.02(c):

- (1) The site plan shows that a proper relationship does exist between thoroughfares, service roads, driveways and parking areas to encourage pedestrian and vehicular traffic safety.
- (2) All the development features including the principal buildings, open spaces, service roads, driveways and parking areas are so located and related as to minimize the possibility of any adverse effects upon adjacent development.
- (3) The site plan includes adequate provision for the screening of parking areas, service areas and active recreation areas from surrounding properties by landscaping and/or ornamental walls or fences. All trees planted shall be as found in specifications approved by the Shade Tree Commission.
- (4) Grading and surface drainage provisions are reviewed and approved by the City Engineer.
- (5) The design and construction standards of all private streets, driveways and parking areas are to be built following approval of plans by the City Engineer according to construction standards specified in the Codified Ordinances.
- (6) Maximum possible privacy for multi-family dwellings and surrounding residential properties shall be provided through good design and use of proper building materials and landscaping. Visual privacy should be provided through structural screening and landscaping treatment. Auditory privacy in multi-family dwellings should be provided through soundproofing. All trees planted shall be as found in specifications approved by the Shade Tree Commission.
- (7) The architectural design of buildings should be developed with consideration given to the relationship of adjacent development in terms of building height, mass, texture, materials, line and pattern and character.



- (8) Building location and placement should be developed with consideration given to minimizing removal of trees and change of topography. Any trees to be removed which are planted in a public right-of-way or on municipal property shall be reviewed by the Shade Tree Commission.
- (9) In multi-family developments, television and other antennas shall be centralized.
- (10) On-site circulation shall be designed to make possible adequate fire and police protection.
- (11) Off-street parking facilities shall be provided in accordance with Chapter 1145. In large parking areas, visual relief shall be provided through the use of tree planted and landscaped dividers, islands and walkways. In multi-family developments no parking or service areas shall be permitted between any street and the main building. All trees planted shall be as found in specifications approved by the Shade Tree Commission.
- (12) Signs shall be provided in accordance with these Codified Ordinances.
- (13) Any trees planted on site shall be on approved list of Shade Tree Commission and planted in accordance with Commission standards.

COMMUNITY DEVELOPMENT DEPARTMENT STAFF RECOMMENDATION

Staff recommends **approval** of application P23-06 for Site Plan approval as submitted, with the condition that the project shall comply with Section 1155.05(a)(1) regarding trash enclosure setbacks or a variance shall be approved by the Board of Zoning Appeals.

Andrew Dutton

From: Patrick Patton

Sent: Monday, February 27, 2023 5:15 PM

To: Andrew Dutton **Subject:** FW: Site Plan Review

Attachments: P23-06 File 3-9-23.pdf; Engineering Checklist for Commercial Site Plan.pdf; Driveway Specs Comm.

Ind. Detail 2020.pdf

Andrew-

My comments:

1. Please refer to the attached engineering checklist for site plan approval.

- 2. This development will require storm water management in order to meet the requirements for redevelopment as determined by the Ohio EPA.
- 3. Driveway aprons must be a minimum of 8 inch thick concrete with fiber reinforcing. See detail, attached.

Thanks,

Patrick Patton, PE

City Engineer

City of Medina, Ohio

Phone: (330) 721-4721

Email: ppatton@medinaoh.org
Website: www.medinaoh.org

Medina City Hall / 132 N. Elmwood Avenue / Medina, Ohio 44256



Andrew Dutton

From: Mark Crumley

Sent: Tuesday, February 21, 2023 9:19 AM

To: Andrew Dutton; Sarah Tome

Subject: FW: Site Plan Review **Attachments:** P23-06 File 3-9-23.pdf

Andrew,

After review of the above said site plan the fire department has no comment at this time.

Thanks

Mark Crumley, Asst. Chief

Medina Fire Department 300 W. Reagan Pkwy. Medina, Ohio 44256

Office: 330-723-5704



GENERAL ZONING INFORMATION 716 N COURT STREET MEDINA, OH 44256 028-19B-14-001, 028-19B-14-009 PARCEL NO. OWNER/DEVELOPER OLIO DEVELOPMENT GROUP 1062 RIDGE STREET COLUMBUS, OH 43215 C-3, GENERAL COMMERCIAL ZONING PROPERTY CLASS 430 - RESTAURANT/BAR 16 FT WALL HEIGHT TOTAL SITE AREA (AC) 0.80 AC FLOOD INSURANCE RATE MAP NUMBER 39103C0163D MOST RECENT EFFECTIVE DATE OF FIRM 8/4/2008 BASE FLOOD ELEVATION (BFE) ZONE X MINIMUM LOT FRONTAGE MINIMUM REAR YARD 30'-0" N/A MINIMUM SIDE YARD MAXIMUM BUILDING HEIGHT 40'-0"

SITE DATA TABLE TOTAL SITE AREA (AC) 0.80 AC TOTAL DISTURBED AREA (AC) 0.80 AC 0.17 AC DECREASED IMPERVIOUS (AC) TOTAL R/W DISTURBED AREA (AC)


PARKING CALCULATION				
USE	SQUARE FOOTAGE		MINIMUM SPACES	MAXIMUM SPACES
MEDICAL OFFICES	4,505 X		1 PER 200 SF = 23 SPACES	23 X 20% = 27 SPACES
TOTAL PARKING PROVIDED FOR PARCEL			27	
PROVIDED ADA PARKING (VAN/TOTAL)			1/2	N/A

<u>LEGEND</u>


PARKING SPACES

SITE PLAN OLIO DEVELOPMENT GROUP

MEDICAL OFFICE BUILDING 716 NORTH COURT STREET MEDINA, OHIO 44256

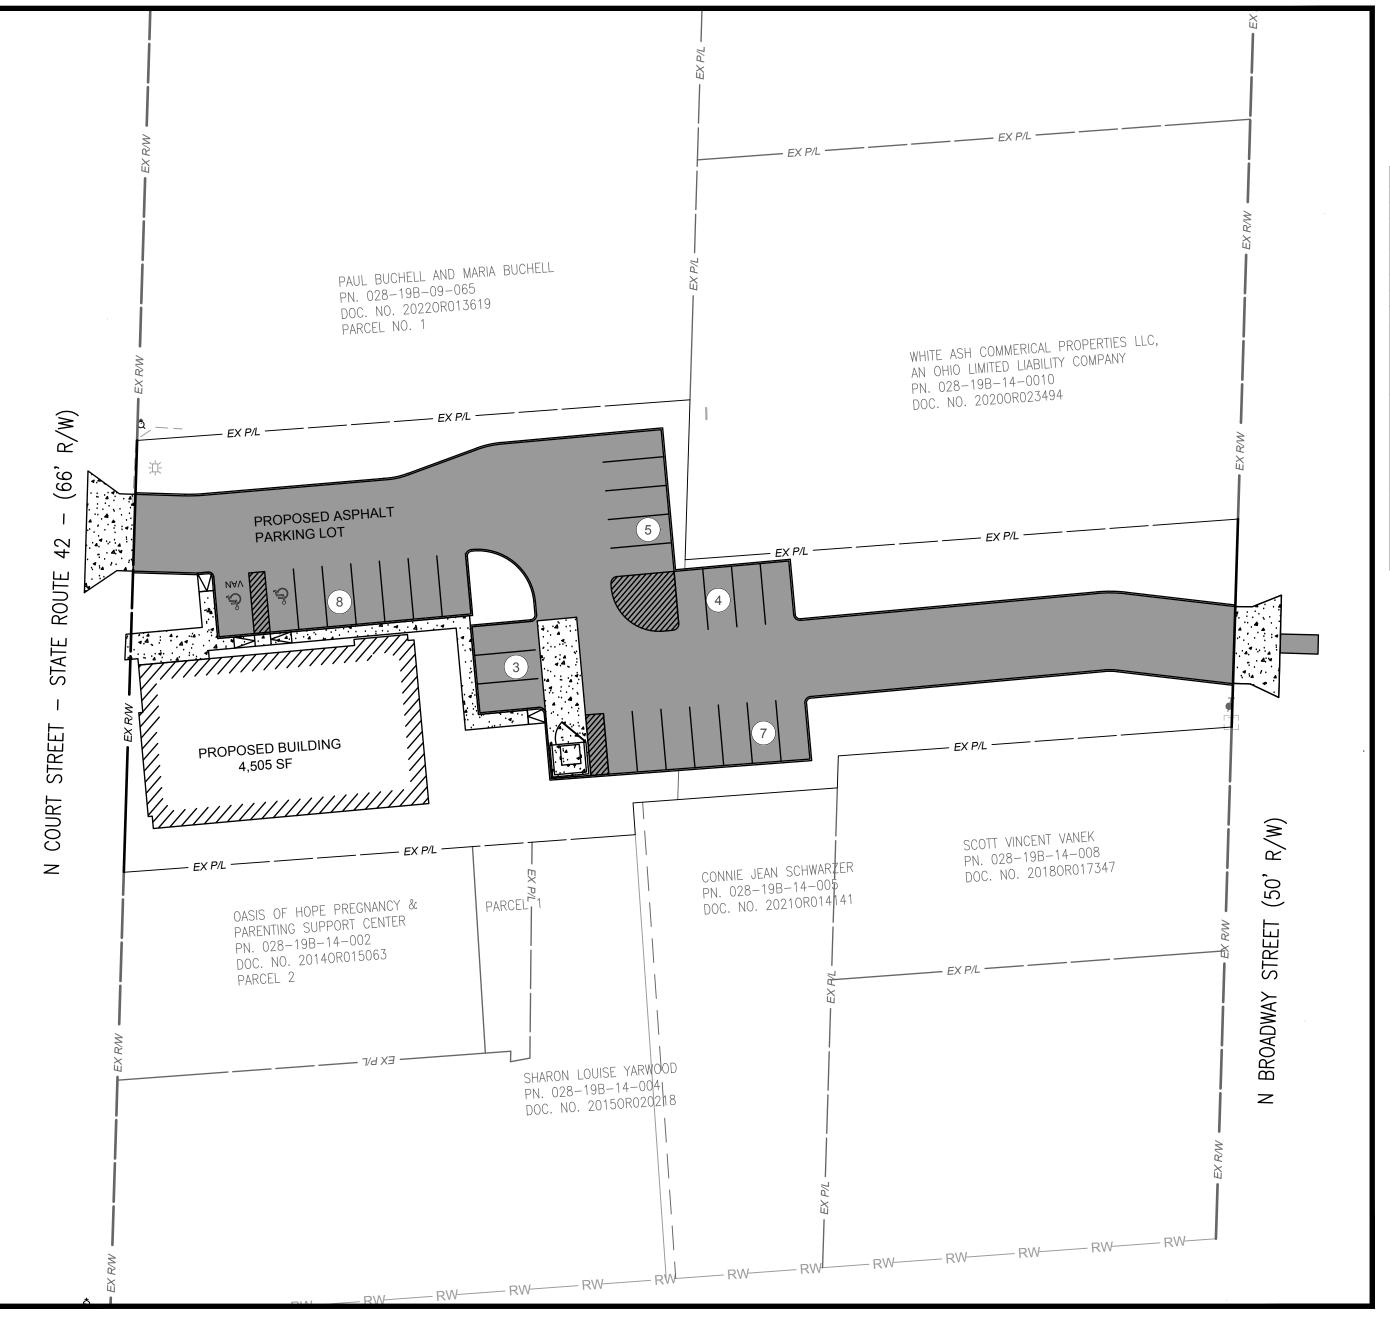

INDEX MAP

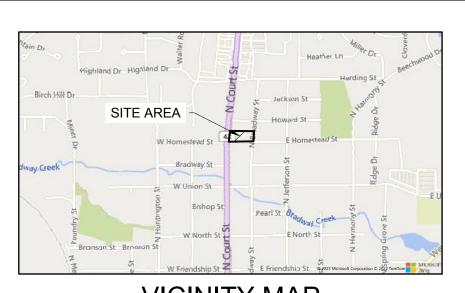

VICINITY MAP


OWNER/DEVELOPER: OLIO DEVELOPMENT GROUP 1062 RIDGE STREET COLUMBUS, OHIO 43215

DESIGN ENGINEER: OSBORN ENGINEERING 130 EAST CHESTNUT ST SUITE 401 COLUMBUS, OHIO 43212 CONTACT: WES DAVIS, P.E. PHONE: 614-556-4272 X5009 EMAIL: WDAVIS@OSBORN-ENG.COM

PROJECT DESCRIPTION:

DEMOLITION OF FORMER RESTAURANT/BAR AND CONSTRUCTION OF MEDICAL OFFICE BUILDING. THE SITE WILL NEED FULL DEPTH REPLACEMENT OF ASPHALT, DEMOLITION AND RECONSTRUCTION OF CURBS, ADDITIONAL LANDSCAPING, AND REROUTING OF EXISTING UTILITIES.

POINT #	NORTHING	EASTING	ELEVATION	DESCRIPTION
CP 100	539904.237	2143879.942	1037.80	MAG NAIL SET
CP 101	539861.309	2144102.605	1034.26	MAG NAIL SET
CP 102	539973.108	2143659.031	1032.46	MAG NAIL SET
CP 135	539850.207	2143795.429	1036.78	MAG NAIL SET
CP 136	539945.609	2143799.409	1036.21	MAG NAIL SET
	BENC	CHMARKS (BASE	D ON NAVD88)
BM 200	539976.266	2143721.041	1035.58	NORTH FLANGE BOLT, FIRE HYDRANT ON EAST SIDE OF N COURT STREET, SOUTHWES' CORNER OF 740 N COURT STREET
BM 201	539703.137	2143684.104	1042.72	WEST FLANGE BOLT, FIRE HYDRANT AT NORTHEAST CORNER OF THE INTERSECT OF N COURT STREET AND HOMESTEAD ROAD, SOUTHW CORNER OF 704 N COURT STREET
BM 202	539847.192	2144094.895	1037.11	NAIL FOUND IN THE NORTH S OF A TELEPHONE AND POWE POLE ON THE EAST SIDE OF BROADWAY STREET, AT THE NORTHWEST CORNER OF 610 BROADWAY STREET

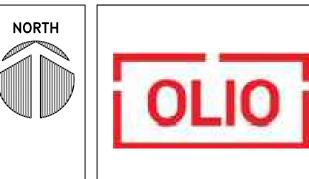



OLIO **DEVELOPMENT** GROUP

> **MEDICAL** OFFICE BUILDING

PROJECT LOCATION: 716 N COURT ST MEDINA, OH 44256

ISSUED

Unless otherwise stated in Contract, The Osborn Engineering Company retains copyright ownership. Instruments of Service may only be used for the purpose described in the Contract. The Osborn Engineering Company may grant specific usage rights under license, and / or may transfer copyright ownership / assignment in writing. Reproduction,

re-use or re-distribution of Instruments

of Service is prohibited. DRAWN BY CHECKED BY WD CLIENT PROJ. NO.

OSBORN PROJ. NO. J20221669.000

TITLE SHEET

DRAWING NO.

#

GRAPHIC SCALE

INDEX OF SHEETS

TITLE SHEET

EXISTING CONDITIONS

EXISTING CONDITIONS

CONSTRUCTION DETAILS

DEMOLITION PLAN

SITE LAYOUT PLAN

SITE UTILITY PLAN

UNDERGROUND UTILITIES

2 WORKING DAYS BEFORE YOU DIG CALL 800-362-2764 (TOLL FREE)

OHIO UTILITIES PROTECTION SERVICE NON-MEMBER

MUST BE CALLED DIRECTLY

(IN FEET)

1 inch = 30 ft.

NORTH

PARCEL 1:

SITUATED IN THE CITY OF MEDINA, COUNTY OF MEDINA AND STATE OF OHIO: AND BEING KNOWN AS THE WHOLE CITY LOTS NO. 873, 715 AND 716 AND PART OF CITY LOTS 717 AND 708, BOUNDED AND DESCRIBED AS FOLLOWS:

BEGINNING AT AN IRON STAKE IN THE NORTHWEST CORNER OF LOT 873 AND THE EAST LINE OF NORTH COURT STREET:

THENCE EASTERLY ALONG THE NORTH LINE OF SAID LOT 873 TO THE NORTHEAST CORNER THEREOF;

THENCE SOUTHERLY 125 FEET ALONG THE EAST SIDE OF SAID LOTS 873, 715 AND 716 TO THE SOUTHEAST CORNER OF SAID LOT 716;

THENCE WESTERLY ALONG THE SOUTH LINE OF SAID LOT 716 A DISTANCE OF 14 FEET TO A POINT;

THENCE SOUTHERLY A DISTANCE OF 9.93 FEET TO A POINT; THENCE WESTERLY PARALLEL TO THE SOUTH LINE OF LOT 716 A DISTANCE OF 160.25 FEET TO A POINT IN THE EAST LINE OF NORTH COURT STREET;

THENCE NORTHERLY ALONG THE EAST LINE OF NORTH COURT STREET A DISTANCE OF 135.00 FEET TO THE PLACE OF BEGINNING.

PARCEL 2:

SITUATED IN THE CITY OF MEDINA, COUNTY OF MEDINA AND STATE OF OHIO: AND KNOWN AS BEING A PART OF LOTS 713 AND 714 IN SAID CITY, BOUNDED AND DESCRIBED AS FOLLOWS:

BEGINNING IN THE SOUTHWEST CORNER OF LOT 713, THENCE NORTHERLY ALONG WEST LINE OF LOTS 713 AND 714 A DISTANCE OF 75 FEET TO AN IRON PIN;

THENCE DUE EAST A DISTANCE OF 173.25 FEET TO AN IRON PIN SET IN THE WEST LINE OF NORTH BROADWAY STREET;

THENCE SOUTH 5 DEG. 47' 15" WEST ALONG SAID WEST LINE A DISTANCE OF 65.00 FEET TO AN IRON PIN;

THENCE DUE WEST A DISTANCE OF 123.25 FEET TO AN IRON PIN;

THENCE S. 5 DEG. 47' 15" W. A DISTANCE OF 10.00 FEET TO THE SOUTH LINE OF LOT 713;

THENCE DUE WEST A DISTANCE OF 50.00 FEET TO THE PLACE OF BEGINNING AND CONTAINING WITHIN SAID BOUNDS 0.2685 ACRES OF LAND, MORE OR LESS, AS SURVEYED BY SANTEE ASSOCIATES IN MAY, 1968.

UTILITY NOTE

THE UTILITIES SHOWN HEREON HAVE BEEN LOCATED FROM FIELD SURVEY INFORMATION AND EXISTING DRAWINGS. THE SURVEYOR MAKES NO GUARANTEE THAT THE UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE.

- GAS SERVICE LINE WAS NOT MARKED IN THE FIELD, NO GAS METER WAS LOCATED ON THE EXTERIOR OF THE EXISTING STRUCTURE, AND COLUMBIA GAS DID NOT PROVIDE PLANS FROM OUPS DESIGN TICKETS. SURVEYOR IS UNABLE TO DETERMINE LOCATION OF GAS SERVICE LINE AT THIS TIME.

ALTA/NSPS LAND TITLE SURVEY

MILESTONE PROPERTIES LTD., AN OHIO LIMITED LIABILITY COMPANY

SITUATED IN THE CITY OF MEDINA, COUNTY OF MEDINA, STATE OF OHIO, BEING KNOWN AS WHOLE CITY LOTS NO. 873, 715 AND 716, AND PART OF CITY LOTS 171,7 708, 714, AND 713

SCHEDULE B TITLE EXCEPTIONS

SCHEDULE B ITEMS FROM TITLE COMMITMENT FILE NO. NCS-1152036-CLE ISSUED BY FIRST AMERICAN TITLE INSURANCE COMPANY WITH AN EFFECTIVE DATE OF OCTOBER 13, 2022 AT 7:30 AM. ITEMS 1-10, 12 ARE NOT SURVEY RELATED.

- TERMS, CONDITIONS, RESTRICTIONS AND PROVISIONS RELATING TO THE USE AND MAINTENANCE OF THE EASEMENT RECORDED ON DECEMBER 15, 1943, AS DOCUMENT NO. DEED BOOK E1, PAGE 273. IS LOCATED ADJACENT TO SUBJECT PARCEL AS SHOWN HEREIN. EASEMENT IS BLANKET IN NATURE AND COVERS PART OF LOT 709 AND PART OF LOT 708, SEWER LINE WAS PROPOSED TO BE 3 FEET EAST OF WESTERN PROPERTY LINE OF PID 028-19B-14-005.
- ANY REFERENCE TO ACREAGE OR AREA IN THE DESCRIPTION OF THE LAND IN SCHEDULE A IS FOR INFORMATIONAL PURPOSES ONLY AND THE ACCURACY OF THE AREA STATED IS NOT INSURED. AREAS SHOWN HEREIN ARE CALCULATED AND TO BE USED FOR REFERENCE ONLY.

GENERAL SURVEY NOTES

- 1. VERTICAL RELIEF INFORMATION IS BASED ON NORTH AMERICAN VERTICAL DATUM OF 1988 BY GPS OBSERVATIONS UTILIZING THE OHIO DEPARTMENT OF TRANSPORTATION VIRTUAL REFERENCE SYSTEM (ODOT VRS)
- 2. ZONING INFORMATION WAS NOT PROVIDED BY CLIENT AS PER TABLE A ITEM 6(a). PER CITY OF MEDINA ZONING MAP, THE SUBJECT PARCELS ARE IN ZONING DISTRICT R-3 (HIGH DENSITY URBAN RESIDENTIAL).
- 3. THERE ARE 47 PARKING SPACES, NONE OF WHICH VISIBLY DESIGNATED AS HANDICAPPED.
- 4. PER TABLE A. ITEM 16 NO EVIDENCE OF RECENT EARTHMOVING WORK WAS FOUND.
- 5. ELEVATIONS WERE TAKEN AT THE BUILDING ENTRANCES, NOT TO BE CONSIDERED FINISHED FLOOR ELEVATIONS. DOOR SILL ELEVATION: 1036.61'
- 6. A. POTENTIAL ENCROACHMENT: WOOD RAILROAD TIE & CONCRETE PAVER STEPS APPEAR TO CONNECT THE NORTH EDGE OF THE ASPHALT PARKING LOT OF SUBJECT PARCEL 1 (PN 208-19B-14-001) TO THE SOUTH EDGE OF THE ASPHALT PARKING LOT OF THE ADJOINING PARCEL (PN 028-19B-09-065). THE ENCROACHMENT APPEARS INTENTIONAL AS TO CONNECT THE TWO PARKING LOTS, BUT THE TITLE REPORT DOES NOT STATE ANY ACCESS/WALKWAY EASEMENTS BETWEEN THE TWO PARCELS. STEPS MAY HAVE BEEN INSTALLED PER AGREEMENT BETWEEN PRIOR OWNERS, BUT ADDITIONAL PAROLE EVIDENCE WOULD BE REQUIRED TO VERIFY.
- 6. B. POTENTIAL ENCROACHMENT: CONCRETE STEPS APPEAR TO CONNECT THE SOUTH EDGE OF THE ASPHALT PARKING LOT OF SUBJECT PARCEL 1 (PN 208-19B-14-001) TO THE NORTH EDGE OF THE CONCRETE PARKING LOT OF THE ADJOINING PARCEL (PN 028-19B-14-002). THE ENCROACHMENT APPEARS INTENTIONAL AS TO CONNECT THE TWO PARKING LOTS, BUT THE TITLE REPORT DOES NOT STATE ANY ACCESS/WALKWAY EASEMENTS BETWEEN THE TWO PARCELS. STEPS MAY HAVE BEEN INSTALLED PER AGREEMENT BETWEEN PRIOR OWNERS, BUT ADDITIONAL PAROLE EVIDENCE WOULD BE REQUIRED TO


FLOOD NOTE

BY GRAPHIC PLOTTING ONLY, THIS PROPERTY IS IN ZONE X OF THE FLOOD INSURANCE RATE MAP, COMMUNITY NO. 390383 AND MAP NO. 39103C0163D WHICH BEARS AN EFFECTIVE DATE OF AUGUST 4, 2008. NO FIELD SURVEYING WAS PREFORMED TO DETERMINE THIS ZONE AND AN ELEVATION CERTIFICATE MAY BE NEEDED TO VERIFY THIS DETERMINATION OR APPLY FOR A VARIANCE FORM THE FEDERAL EMERGENCY MANAGEMENT AGENCY.

ZONE X

-AREA OF MINIMAL FLOOD HAZARD

LOCATION MAP

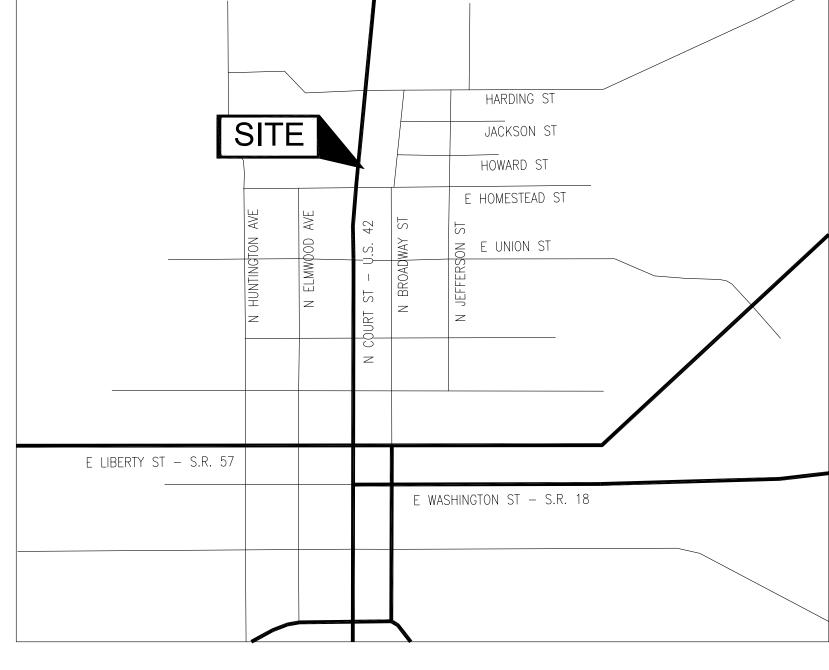

NOT TO SCALE

ALTA/NSPS LAND TITLE SURVEY

STATE OF OHIO, COUNTY OF MEDINA, CITY OF MEDINA

716 NORTH COURT STREET, MEDINA, OH 44256

BASED ON TITLE COMMITMENT FILE NO. NCS-1152036-CLE OF FIRST AMERICAN TITLE INSURANCE COMPANY EFFECTIVE DATE: OCTOBER 13, 2022 AT TIME 7:30 a.m.

SURVEYOR'S CERTIFICATION

TO : MILESTONE PROPERTIES LTD., AN OHIO LIMITED LIABILITY COMPANY AND IT'S AFFILIATES, SUCCESSORS AND ASSIGNS AND FIRST AMERICAN TITLE INSURANCE COMPANY;

THIS IS TO CERTIFY THAT THIS MAP OR PLAT AND THE SURVEY ON WHICH IT IS BASED WERE MADE IN ACCORDANCE WITH THE 2021 MINIMUM STANDARD DETAIL REQUIREMENTS FOR ALTA/NSPS LAND TITLE SURVEYS, JOINTLY ESTABLISHED AND ADOPTED BY ALTA AND NSPS, AND INCLUDES ITEMS 1, 2, 3, 4, 5, 6(a), 8, 11(a), 11(b), 13, 16, AND 19 OF TABLE A THEREOF. THE FIELD WORK WAS COMPLETED ON DECEMBER 16, 2022.

ARCHITECTS ENGINEERS PLANNERS

580 N. Fourth St.
Suite 630
Columbus, Ohio
43215
OHM-ADVISORS.COM

OSBORN
ENGINEERING

130 East Chestnut St - Suite 401 | Columbus, OH 43212
614-556-4272

OLEO DEVELOPMENT GROUP

> MEDICAL OFFICE BUILDING

PROJECT LOCATION: 716 N COURT ST MEDINA, OH 44256

TAG ISSUED DATE

1 02/15/23

Unless otherwise stated in Contract,
The Osborn Engineering Company
retains copyright ownership.
Instruments of Service may only be
used for the purpose described in the
Contract. The Osborn Engineering
Company may grant specific usage
rights under license, and / or may
transfer copyright ownership /
assignment in writing. Reproduction,

re-use or re-distribution of Instruments of Service is prohibited.


DRAWN BY DT CHECKED BY WD CLIENT PROJ. NO.


OSBORN PROJ. NO. J20221669.000

EXISTING CONDITIONS

DRAWING NO.

REGISTERED SURVEYOR: RYAN M. KING REGISTERED LAND SURVEYOR NO.: 8798 IN THE STATE OF: OHIO DATE OF SURVEY: DECEMBER 14, 2022 DATE PRINTED: JANUARY 4, 2023

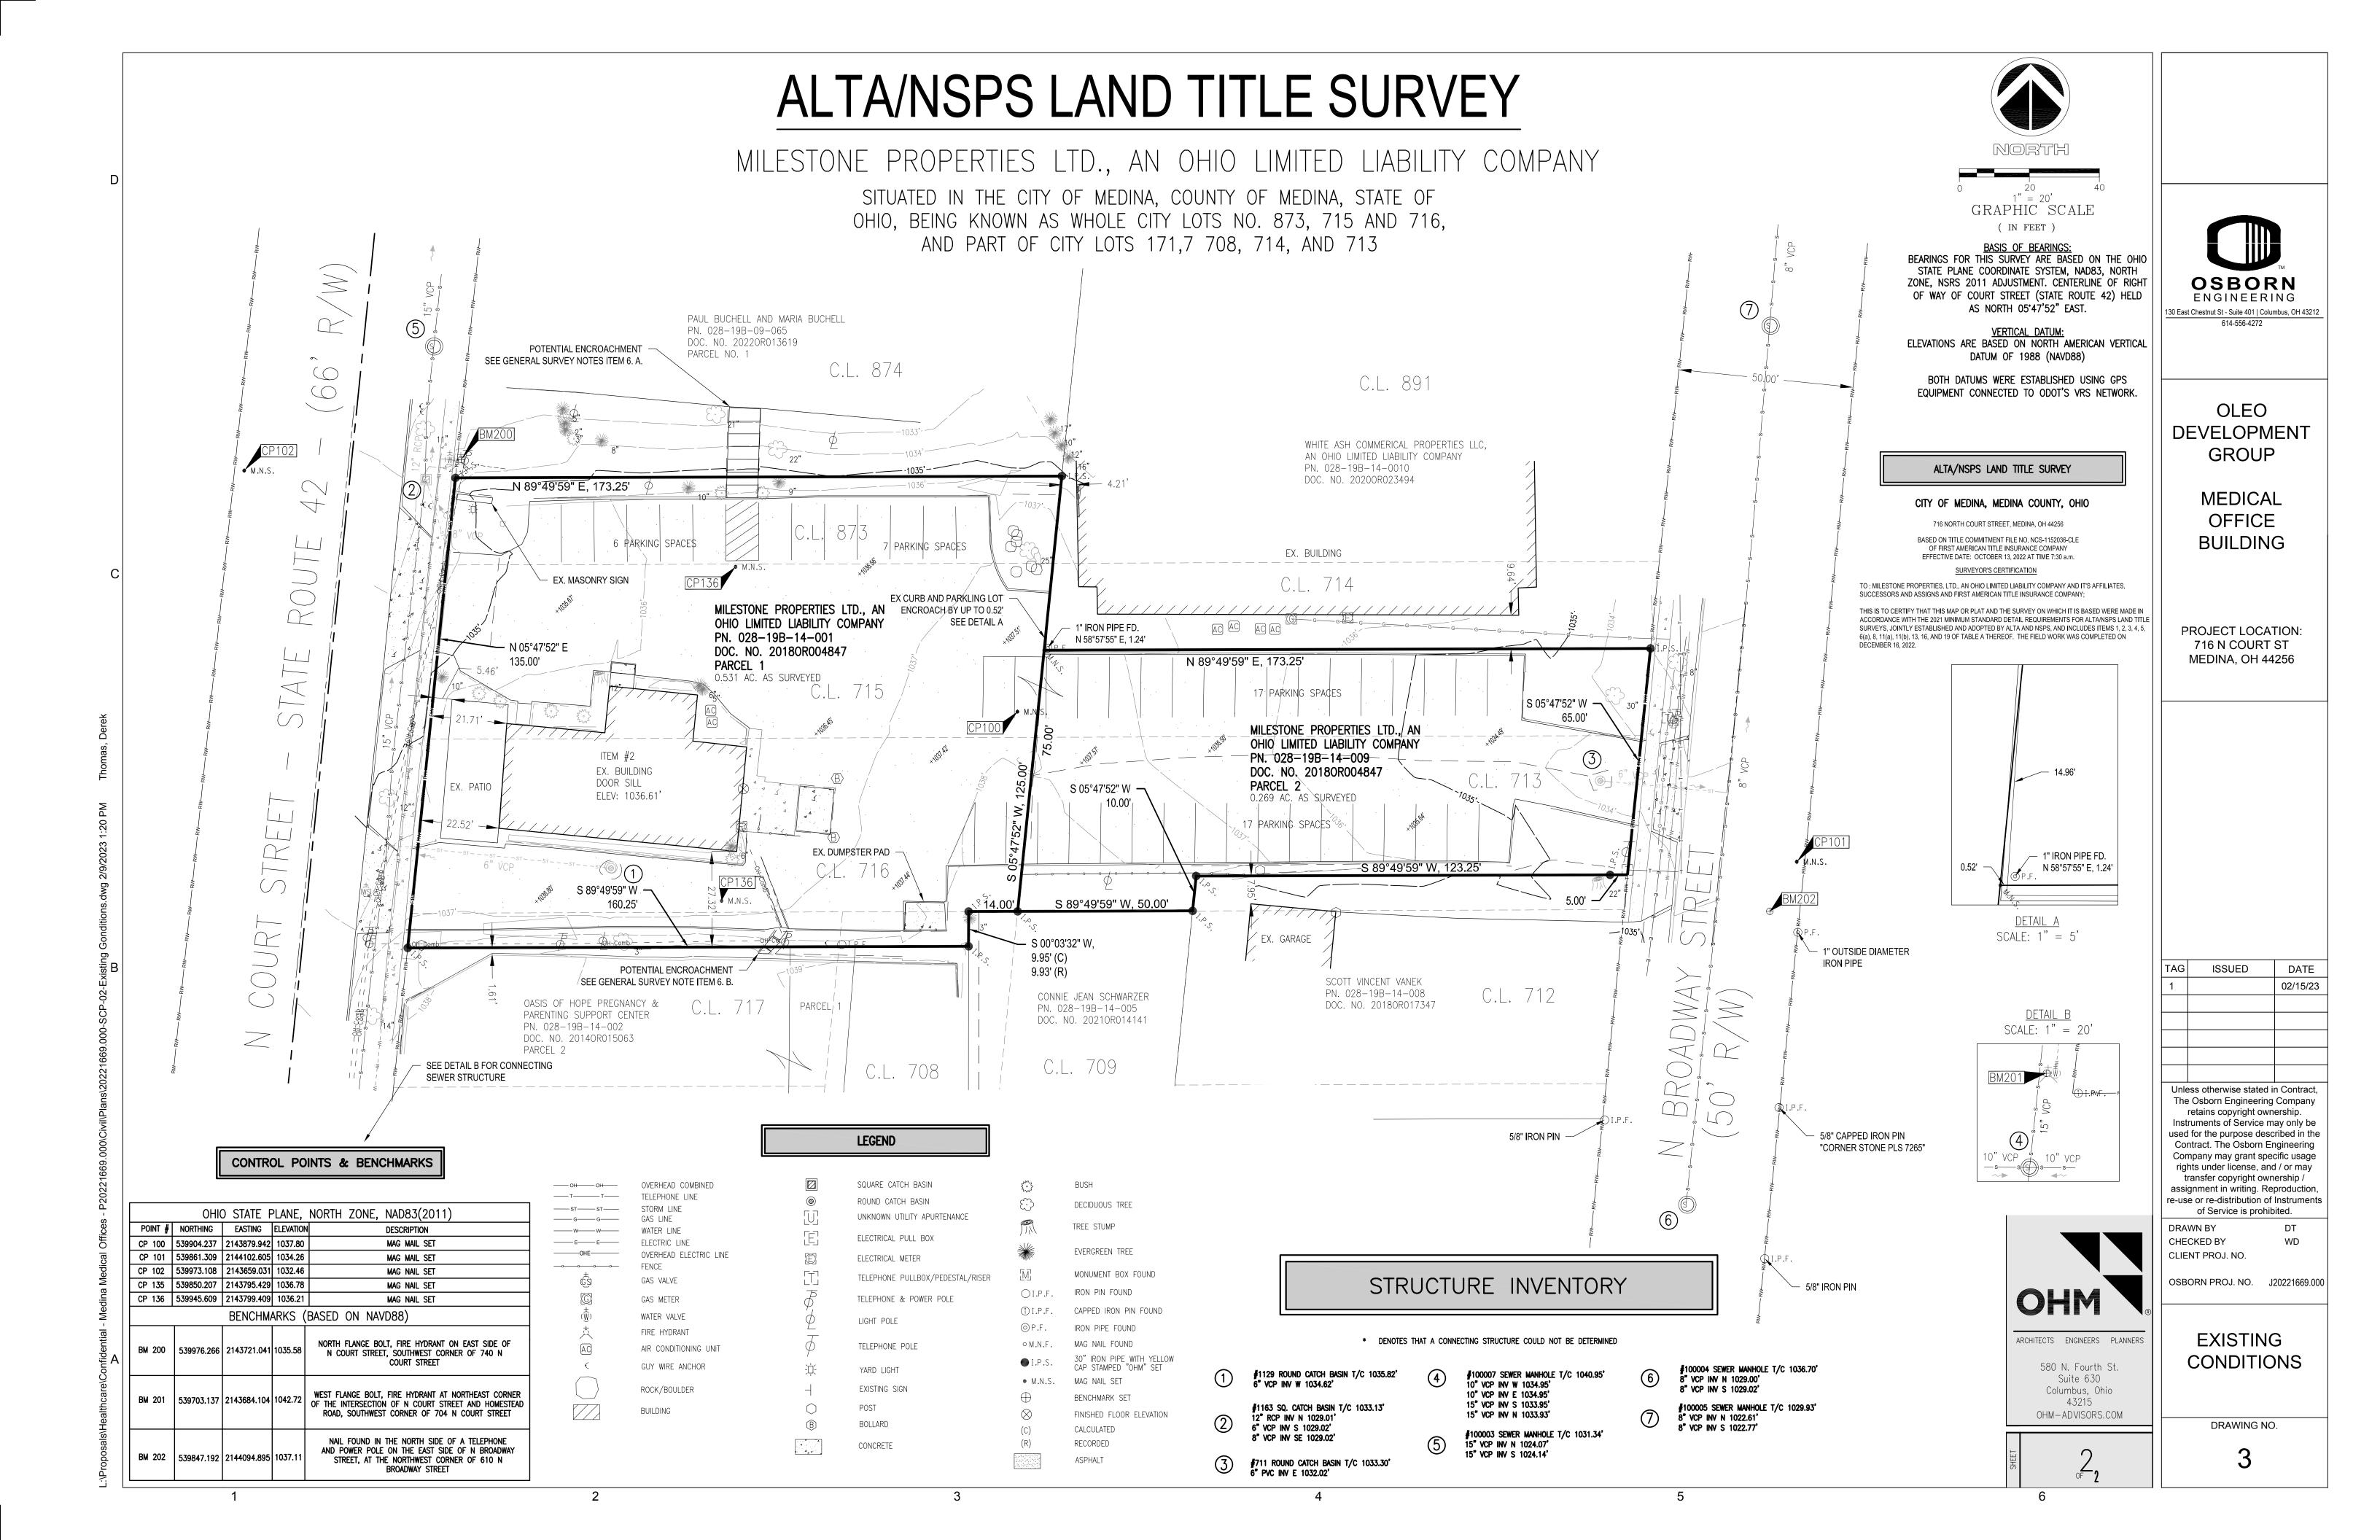

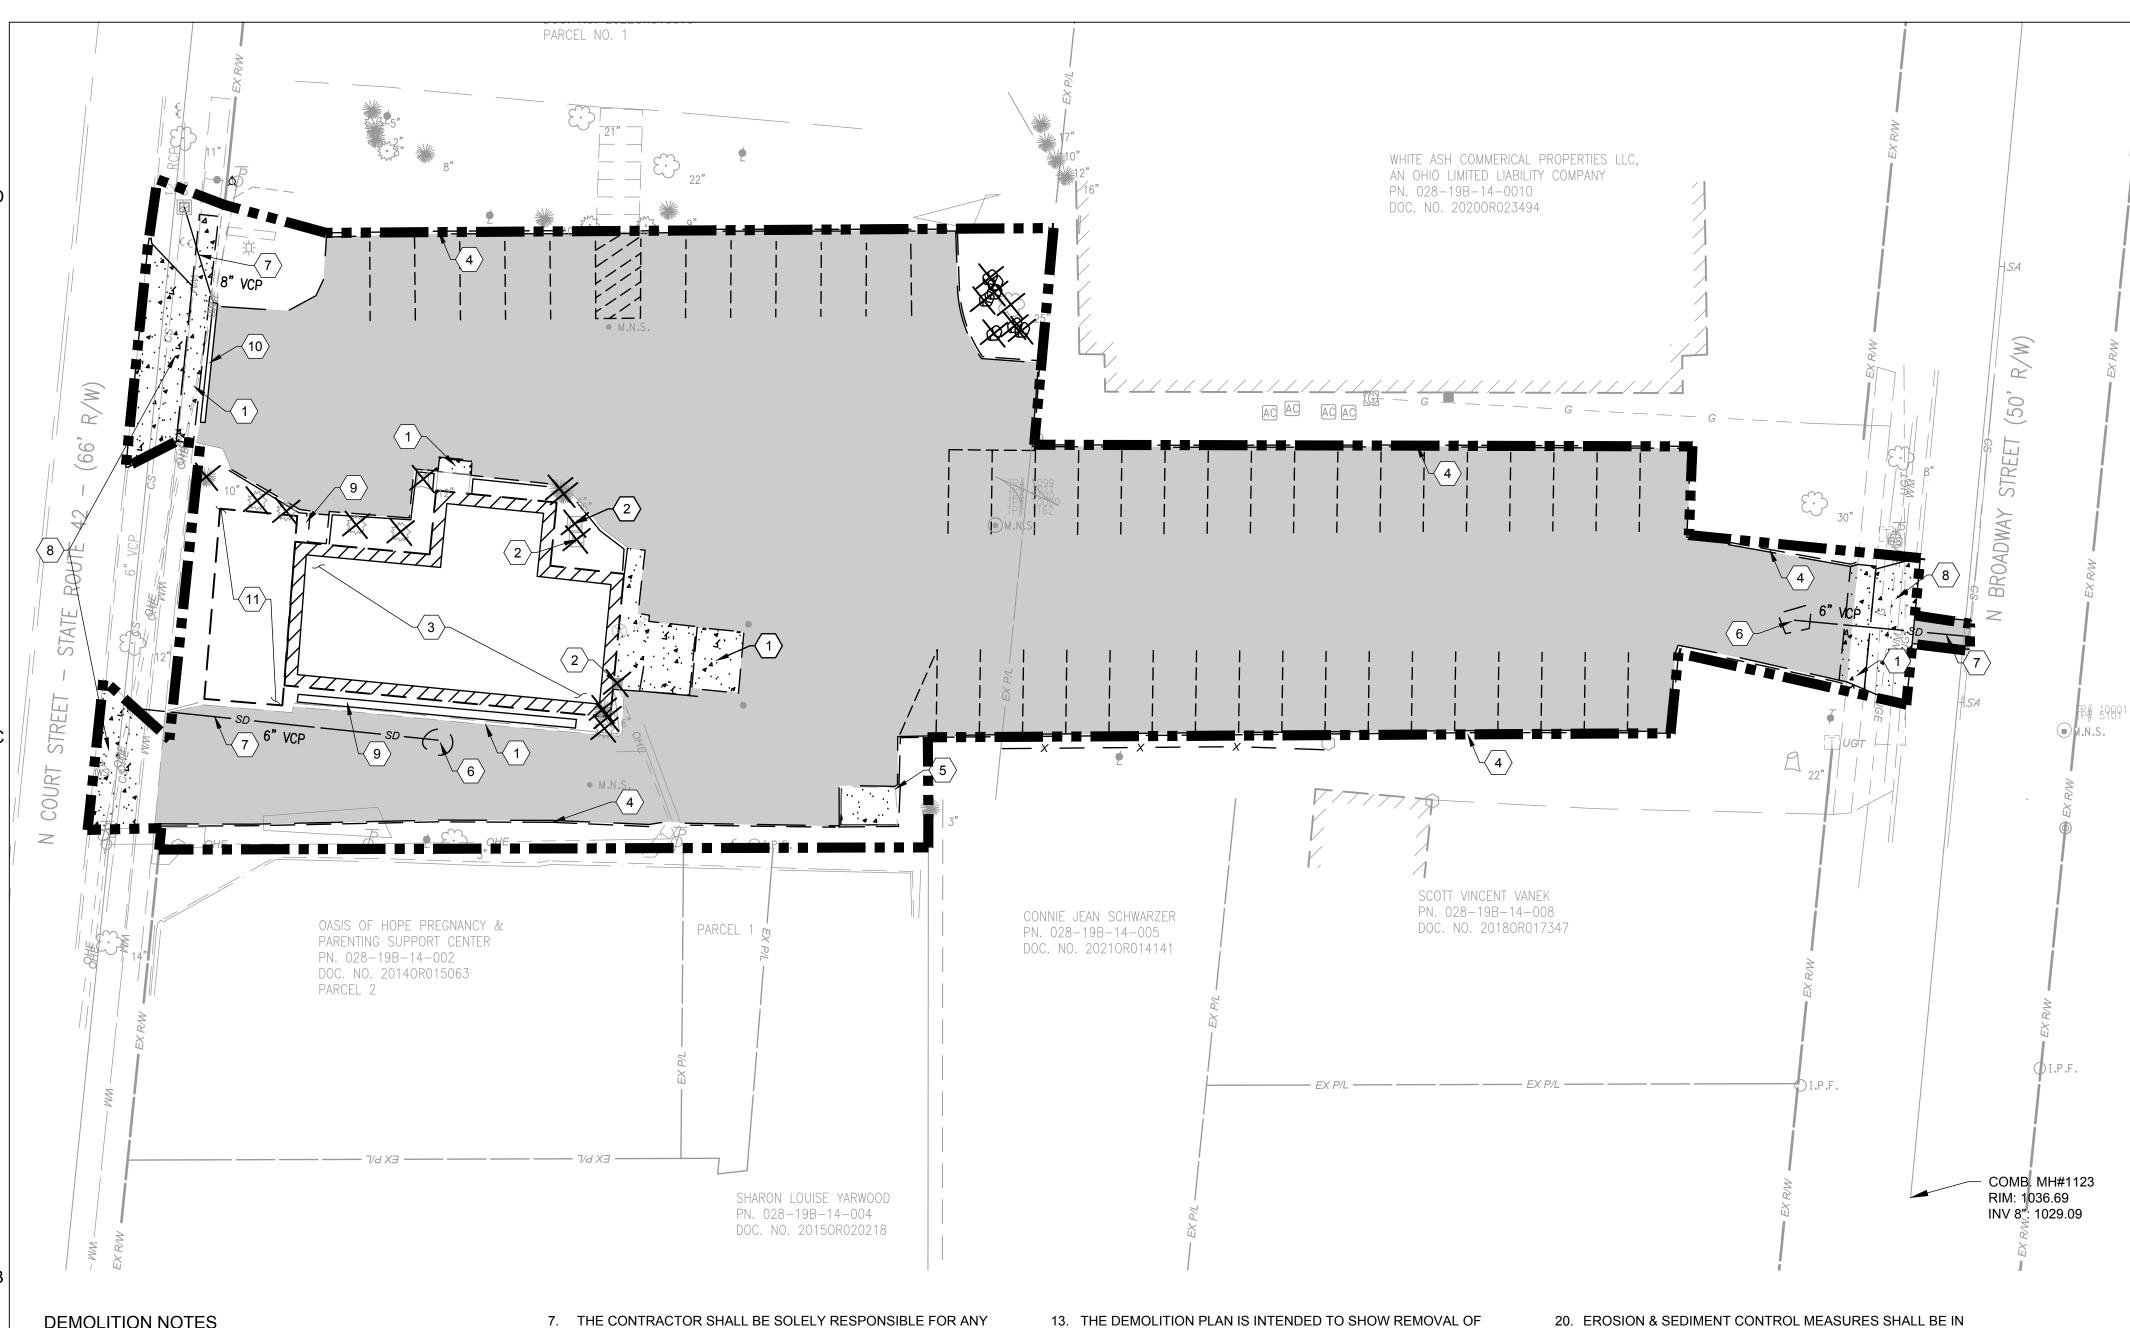

DEMOLITION NOTES

- 1. ALL DEBRIS SHALL NOT BE BURIED ON THE SITE. ALL UNSUITABLE MATERIAL AND DEBRIS SHALL BE REMOVED FROM THE SITE AND DISPOSED OF IN ACCORDANCE WITH ALL CITY, STATE AND FEDERAL LAWS AND ORDINANCES.
- 2. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD LOCATE ANY AND ALL UTILITIES PRIOR TO PERFORMING ANY WORK. CONTACT THE APPLICABLE UTILITIES PROTECTION SERVICE AT A MINIMUM OF 48 HOURS IN ADVANCE OF WORK TO BE DONE NEAR ANY EXISTING UTILITY MAIN.
- 3. CONTRACTOR SHALL NOT DISTURB EXISTING PAVEMENT OUTSIDE OF DEMOLITION AREA.
- 4. ITEMS DESIGNATED FOR DEMOLITION SHALL NOT BE DISTURBED BY THE CONTRACTOR UNTIL THEY ARE FURNISHED WITH NOTICE TO PROCEED BY THE OWNER. AS SOON AS SUCH NOTICE HAS BEEN GIVEN, THE CONTRACTOR SHALL PERFORM THE DEMOLITION UNDER THE DIRECTION OF THE OWNER'S REPRESENTATIVE.
- 5. THE SIZE AND LOCATION OF BOTH HORIZONTAL AND VERTICAL OF THE UNDERGROUND UTILITIES SHOWN HERE HAVE BEEN OBTAINED BY A SEARCH OF AVAILABLE RECORDS. VERIFICATION BY FIELD OBSERVATION HAS BEEN CONDUCTED WHERE POSSIBLE. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATIONS AND DEPTHS OF ALL EXISTING UTILITIES PRIOR TO CONSTRICTION. IMMEDIATELY NOTIFY THE ENGINEER OF ANY DISCREPANCIES.
- 6. THE CONTRACTOR SHALL CONTACT RESPECTIVE UTILITY COMPANIES PRIOR TO DEMOLITION TO COORDINATE DISCONNECTION AND REMOVAL OF EXISTING UTILITIES WITHIN THE AREA OF WORK.

- DAMAGE TO EXISTING UTILITIES THAT ARE INTENDED TO CONTINUE TO PROVIDE SERVICE WHETHER THESE UTILITIES ARE SHOWN ON THE PLAN OR NOT.
- UPON DISCOVERY OF UNDERGROUND TANKS OR CONTAMINATED SOILS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE OWNER'S REPRESENTATIVE. NO REMOVAL OF TANKS OR CONTAMINATED SOILS SHALL OCCUR UNTIL AUTHORIZED BY THE OWNER AND PROPER AUTHORITIES.
- 9. ALL EARTHWORK, SUBGRADE PREPARATION AND BACKFILL REQUIREMENTS SHALL BE PER THE LATEST CITY OF MEDINA AND DOT STANDARD DETAILS AND SPECIFICATIONS.
- 10. THE USE OF EXPLOSIVES SHALL NOT BE PERMITTED.
- 11. EXISTING ABANDONED UTILITIES WITHIN THE PROPOSED WORK LIMITS SHALL BE REMOVED IF POSSIBLE. IF SUCH UTILITIES ARE PRESENT, THEY SHOULD BE REMOVED AND RELOCATED OR ABANDONED IN PLACE. IF ABANDONED IN PLACE, IT IS RECOMMENDED THAT THE UTILITIES PIPE BE FILLED WITH LOW STRENGTH MORTAR GROUT TO AVOID POTENTIAL COLLAPSE IN THE FUTURE. SHOULD THE UTILITIES LINES BE REMOVED FROM THE SITE, THE RESULTANT TRENCH EXCAVATIONS SHOULD BE BACKFILLED AND COMPACTED IN ACCORDANCE WITH THE LATEST MAG STANDARD DETAILS AND SPECIFICATIONS.
- 12. ALL MATERIAL, EXCEPT THAT BELONGING TO A PUBLIC UTILITY COMPANY OR DENOTED FOR SALVAGE, SHALL BECOME THE PROPERTY OF THE CONTRACTOR. THE CONTRACTOR SHALL NOTIFY THE OWNER OF WATER, ELECTRIC OR GAS METERS WHEN THE METERS ARE READY FOR REMOVAL, AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR DISCONNECTING ALL UTILITIES IN COMPLIANCE WITH LOCAL REQUIREMENTS.

- 13. THE DEMOLITION PLAN IS INTENDED TO SHOW REMOVAL OF KNOWN SITE FEATURES AND UTILITES AS SHOWN ON THE SURVEY. THERE MAY BE OTHER SITE FEATURES, UTILITIES, STRUCTURES AND MISCELLANEOUS ITEMS BOTH BURIED AND ABOVE GROUND THAT ARE WITHIN THE LIMITS OF WORK THAT MAY NEED TO BE REMOVED FOR THE PROPOSED PROJECT THAT ARE NOT SHOWING HEREON.
- 14. EXISTING WATER SERVICE CONNECTIONS NOTED SHALL BE ABANDONED IN ACCORDANCE WITH THE CITY OF MEDINA WATER STANDARDS.
- 15. ALL EXISTING CONDITIONS WITHIN THE RIGHT-OF-WAY DISTURBED BY THE CONSTRUCTION OF THIS PROJECT SHALL BE IMMEDIATELY RESTORED TO THE PRE-CONSTRUCTION CONDITION OR BETTER.
- 16. THE CONTRACTOR SHALL CAREFULLY PRESERVE BENCHMARKS, PROPERTY CORNERS, REFERENCE POINTS AND STAKES.
- 17. ANY DAMAGE CAUSED TO THE PAVEMENT, DRIVE, DRAINAGE SYSTEMS, UNDERGROUND OR OVERHEAD UTILITIES, PIPE LINES OR LANDSCAPING, EITHER WITHIN THE RIGHT-OF-WAY OR ON ADJACENT PROPERTIES, SHALL BE FULLY RESTORED PROMPTLY BY THE CONTRACTOR WITH ALL RELATED COSTS BEING THE FULL RESPONSIBILITY OF THE CONTRACTOR.
- 18. WHERE NECESSARY TO REMOVE PAVEMENTS OR DRIVES, THE PAVEMENT SHALL BE SAWCUT FULL DEPTH IN NEAT, STRAIGHT LINES, WHERE REMOVED IN WALK AREAS, SHALL BE SAWCUT AT NEAREST JOINT.
- 19. ALL PAVEMENT AND/OR FOUNDATIONS THAT ARE REMOVED SHALL BE DISPOSED OF OFFSITE PROPERLY.

- PLACE AND MAINTAINED DURING DEMOLITION ACTIVITIES.
- 21. THE PURPOSE OF THIS DRAWING IS TO CONVEY THE OVERALL SCOPE OF WORK AND IT IS NOT INTENDED TO COVER ALL DETAILS OR SPECIFICATIONS REQUIRED TO COMPLY WITH GENERALLY ACCEPTED DEMOLITION PRACTICES. THE CONTRACTOR SHALL THOROUGHLY FAMILIARIZE THEMSELVES WITH THE SITE, SCOPE OF WORK AND ALL EXISTING CONDITIONS AT THE SITE PRIOR TO BIDDING AND COMMENCING THE WORK. THE DEMOLITION CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR MEANS, METHODS, TECHNIQUES, OR PROCEDURES USED TO COMPLETE THE WORK IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS AND IS LIABLE FOR THE SAFETY OF THE PUBLIC OR CONTRACTOR'S EMPLOYEES DURING THE COURSE OF THE

(#) SITE DEMOLITION PLAN CODED NOTES:

- 1. EXISTING SIDEWALK TO BE REMOVED
- 2. EXISTING HVAC UTILITIES TO BE REMOVED
- 3. EXISTING BUILDING TO BE REMOVED
- 4. EXISTING CURB TO BE REMOVED
- 5. EXISTING FENCE TO BE REMOVED
- 6. EXISTING CATCH BASIN TO BE REMOVED
- 7. EXISTING STORM WATER PIPE TO BE REMOVED
- 8. EXISTING DRIVE APRON TO BE REMOVED
- 9. EXISTING LANDSCAPING AREA TO BE REMOVED
- 10. EXISTING TRENCH DRAIN TO BE REMOVED

11. EXISTING ENCLOSED PATIO TO BE REMOVED

SITE DEMOLITION LEGEND



PROJECT LIMITS OF DEMOLITION

ITEM TO BE REMOVED



OLIO DEVELOPMENT GROUP

> **MEDICAL** OFFICE **BUILDING**

PROJECT LOCATION: 716 N COURT ST MEDINA, OH 44256

TAG ISSUED DATE

Unless otherwise stated in Contract, The Osborn Engineering Company retains copyright ownership. Instruments of Service may only be used for the purpose described in the Contract. The Osborn Engineering Company may grant specific usage rights under license, and / or may transfer copyright ownership / assignment in writing. Reproduction, re-use or re-distribution of Instruments

of Service is prohibited.

DRAWN BY CHECKED BY CLIENT PROJ. NO.

NORTH

GRAPHIC SCALE

(IN FEET)

1 inch = 20 ft.


OSBORN PROJ. NO. J20221669.000

DT

WD

DEMOLITION PLAN

DRAWING NO.

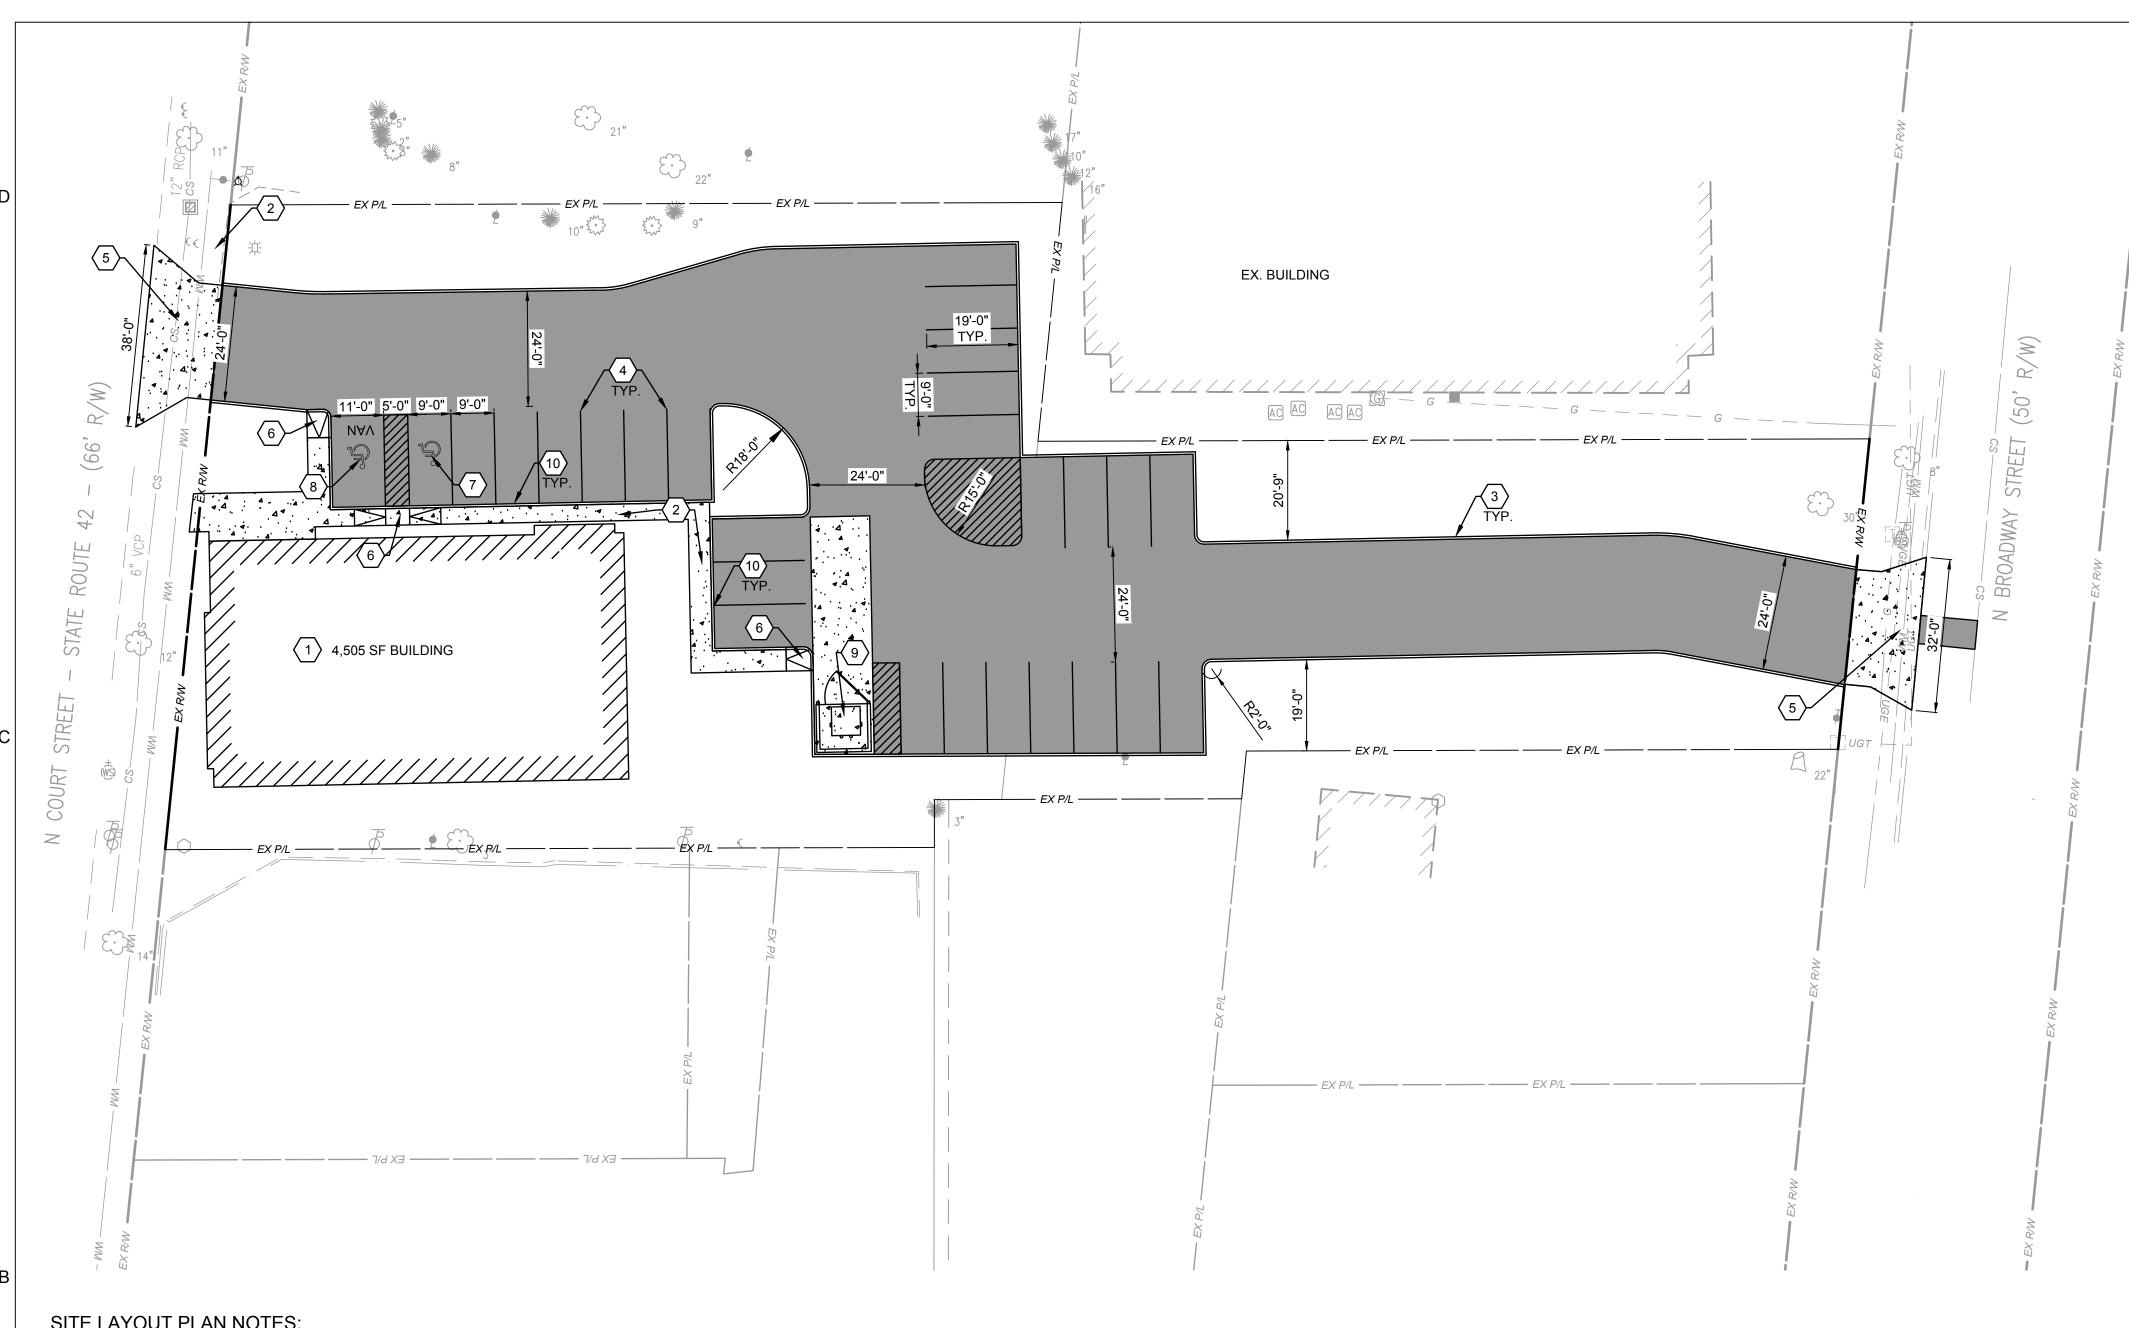

(#) SITE LAYOUT PLAN CODED NOTES:

- 1. PROPOSED BUILDING LOCATION
- 2. PROPOSED 4" CONCRETE SIDEWALK (SEE DETAIL E, SHEET 7)
- 3. PROPOSED STRAIGHT 18" CURB (SEE DETAIL F, SHEET 7)
- 4. PROPOSED PAVEMENT STRIPING
- 5. PROPOSED DRIVE APPROACH (SEE DETAIL H, SHEET 7)
- 6. PROPOSED ADA RAMP (SEE DETAIL B, SHEET 7)
- 7. PROPOSED HANDICAP PARKING (SEE DETAIL A, SHEET 7)
- 8. PROPOSED VAN ACCESSIBLE HANDICAP PARKING (SEE DETAIL A, SHEET 7)
- 9. PROPOSED DUMPSTER PAD WITH HEAVY DUTY CONCRETE PAVEMENT (SEE DETAIL H, SHEET 7)
- 10. PROPOSED INTEGRAL CURB AND SIDEWALK WITH 6" REVEAL (SEE DETAIL J, SHEET 7)

SITE LAYOUT PLAN LEGEND:

PROPOSED CONCRETE PAVEMENT

PROPOSED FULL DEPTH ASPHALT REPLACEMENT (SEE DETAIL I, SHEET 7)





OLIO DEVELOPMENT GROUP

> **MEDICAL** OFFICE BUILDING

PROJECT LOCATION: 716 N COURT ST MEDINA, OH 44256

TAG	ISSUED	DATE

Unless otherwise stated in Contract, The Osborn Engineering Company retains copyright ownership. Instruments of Service may only be used for the purpose described in the Contract. The Osborn Engineering Company may grant specific usage rights under license, and / or may transfer copyright ownership /

assignment in writing. Reproduction,

re-use or re-distribution of Instruments of Service is prohibited. DRAWN BY

NORTH

GRAPHIC SCALE

(IN FEET)

1 inch = 20 ft.

CHECKED BY WD CLIENT PROJ. NO.


OSBORN PROJ. NO. J20221669.000

SITE LAYOUT PLAN

DRAWING NO.

SITE LAYOUT PLAN NOTES:

- 1. EXISTING SEWER AND UTILITY LOCATIONS AND DEPTHS ARE TAKEN FROM AVAILABLE RECORDS AND LIMITED FIELD OBSERVATIONS AND ARE NOT GUARANTEED; THEREFORE, LOCATIONS AND DEPTHS ARE APPROXIMATE AND SHOULD NOT BE SCALED. CONTACT O.U.P.S. PRIOR TO EXCAVATING TO LOCATE UTILITIES IN THE FIELD.
- 2. CONTRACTOR SHALL COORDINATE THEIR CONSTRUCTION ACTIVITIES IN ORDER TO PROVIDE ACCESS TO ALL OTHER SECTIONS OF THE BUILDING.
- 3. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS FROM THE CITY OR COUNTY, BEFORE PERFORMING ANY WORK.
- 4. RECONNECT ALL DISTURBED UTILITIES, PIPES, DRAIN TILES, ETC. THAT ARE NOT DESIGNATED FOR
- 5. HAUL IN ADDITIONAL, OR HAUL AWAY EXCESS MATERIAL AS REQUIRED & DISPOSE OF ALL SPOILS AT NO EXTRA TO THE CONTRACT.
- 6. INSTALL SEEDING AND MULCHING REQUIRED TO RESTORE ALL DISTURBED AREAS AS A RESULT OF CONTRACTOR OPERATIONS. THE CONTRACTOR SHALL SEED AND MULCH ALL DISTURBED GRASS AREAS. SEEDING TO BE PERFORMED BETWEEN APRIL 1ST AND SEPTEMBER 30TH.
- 7. EXISTING PAVEMENT GRADES TO MATCH (FLUSH) WHERE NEW PAVEMENT MEETS EXISTING PAVEMENT.
- 8. PAVEMENT JOINT WHERE NEW PAVEMENT MEETS EXISTING TO BE SEALED WITH CONCRETE JOINT SEALER

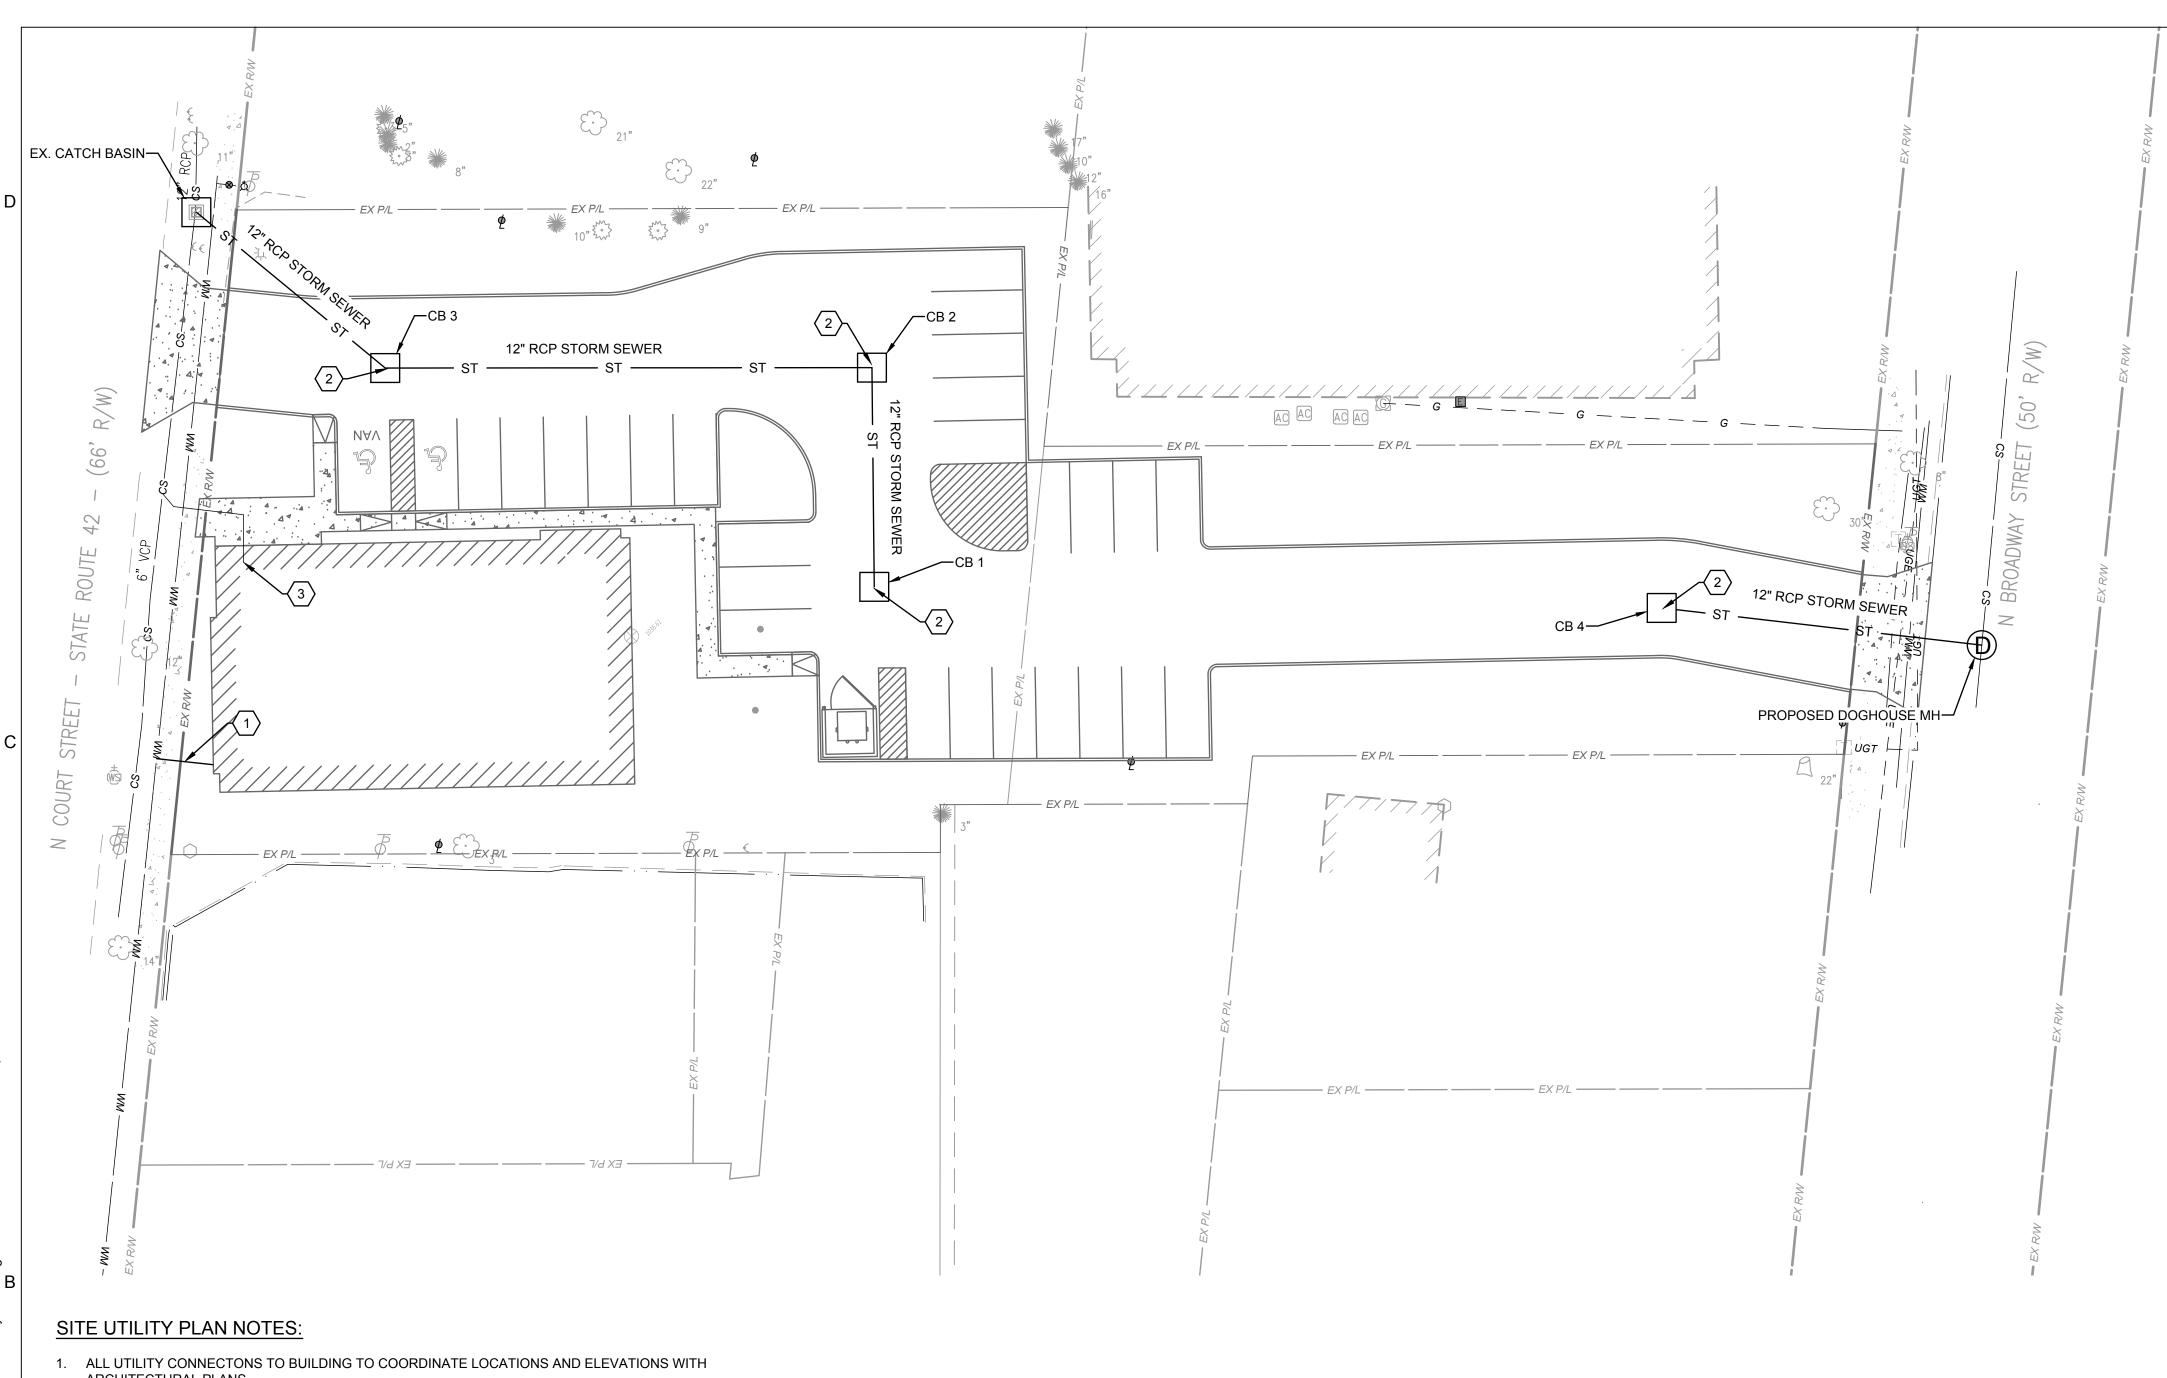

(#) SITE LAYOUT PLAN CODED NOTES:

- 1. PROPOSED 2" DOMESTIC WATER SERVICE CONNECTION
- 2. PROPOSED CATCH BASIN
- 3. EXISTING SANITARY CONNECTION TO BE USED FOR PROPOSED BUILDING (LOCATION AND ELEVATION IS UNKNOWN, VERIFY BEFORE CONSTRUCTION)
- 4. PROPOSED STORM





OLIO DEVELOPMENT GROUP

> MEDICAL OFFICE BUILDING

PROJECT LOCATION: 716 N COURT ST MEDINA, OH 44256

TAG	ISSUED	DATE

Unless otherwise stated in Contract, The Osborn Engineering Company retains copyright ownership. Instruments of Service may only be used for the purpose described in the Contract. The Osborn Engineering Company may grant specific usage rights under license, and / or may transfer copyright ownership / assignment in writing. Reproduction,

re-use or re-distribution of Instruments

of Service is prohibited. DRAWN BY WD CHECKED BY

CLIENT PROJ. NO.

OSBORN PROJ. NO. J20221669.000

SITE UTILITY PLAN


DRAWING NO.


6

- ARCHITECTURAL PLANS
- 2. FINAL ELECTRICAL LAYOUT/LOCATION TO BE VERIFIED WITH ELECTRICAL COMPANY
- 3. FINAL TELEPHONE LAYOUT/LOCATION TO BE VERIFIED WITH ELECTRICAL COMPANY
- 4. 2" WATER SERVICE LINE SHALL BE HDPE PE3408 OR ASTM D2737-05 AWWA C-901 PIPE. LINES TO BE ONE CONTINUOUS PIECE WITH NO SPLICES.
- 5. SANITARY SERVICE IS TO BE SALVAGED AND USED FOR PROPOSED BUILDING.
- 6. EXISTING SEWER AND UTILITY LOCATIONS AND DEPTHS ARE TAKEN FROM AVAILABLE RECORDS AND LIMITED FIELD OBSERVATIONS AND ARE NOT GUARANTEED; THEREFORE, LOCATIONS AND DEPTHS ARE APPROXIMATE AND SHOULD NOT BE SCALED. CONTACT O.U.P.S. PRIOR TO EXCAVATING TO LOCATE UTILITIES IN THE FIELD.

GRAPHIC SCALE (IN FEET) 1 inch = 20 ft.

NORTH

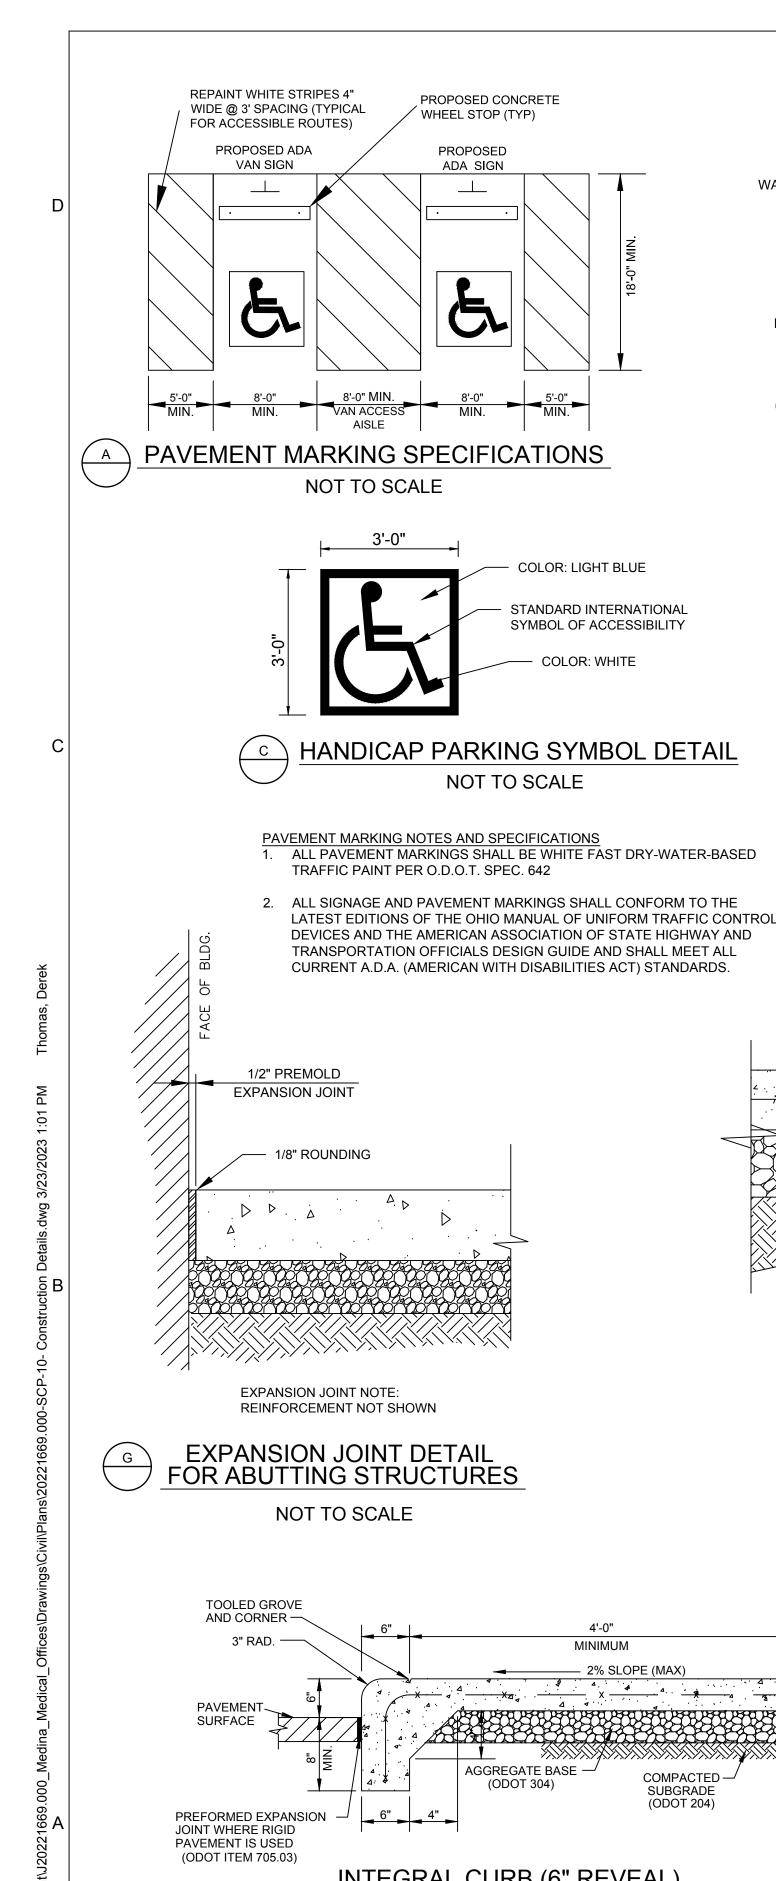

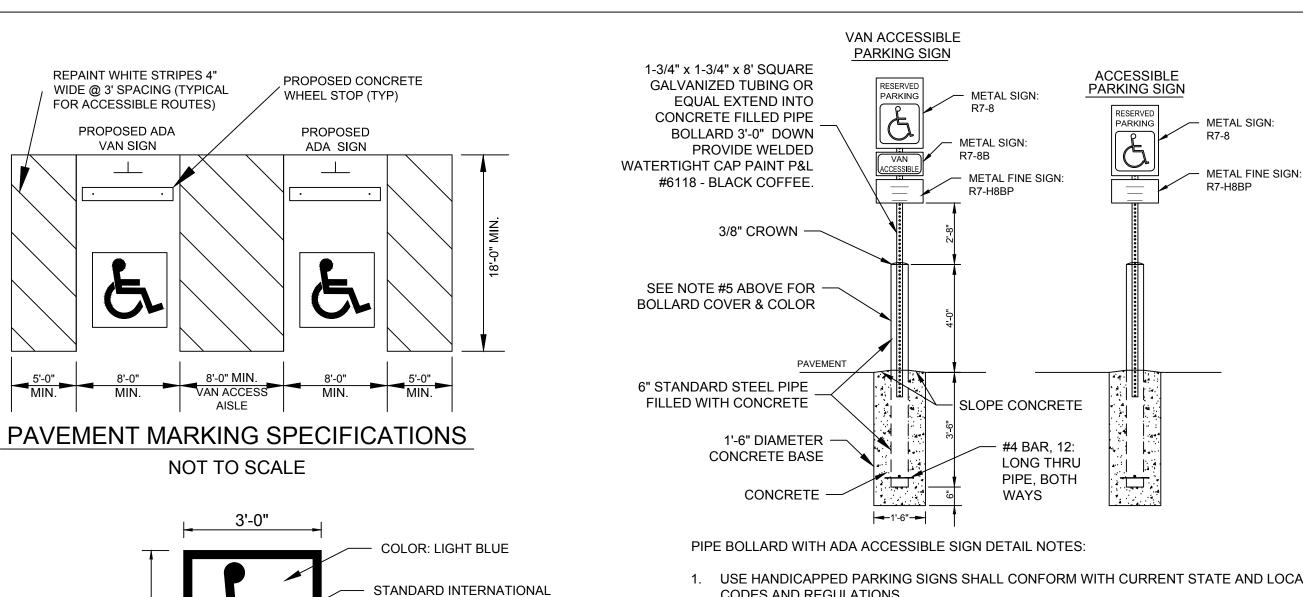

SYMBOL OF ACCESSIBILITY

- COLOR: WHITE

NOT TO SCALE


- 1. USE HANDICAPPED PARKING SIGNS SHALL CONFORM WITH CURRENT STATE AND LOCAL CODES AND REGULATIONS
- USE 3/8"x 4" EXPANSION JOINT WHEN CONCRETE ABUTS RIGID PAVEMENT.
- USE READY-MIX CONCRETE WITH 3,000 PSI STRENGTH AT 28 DAYS.
- TOOL ALL EXPOSED EDGES AND JOINTS TO 1/4" RADIUS. INSTALL 1/4" IDEALSHIELD (OR APPROVED EQUAL) PLASTIC BOLLARD COVER, BLACK IN COLOR, PRIOR TO ATTACHING SIGN PANEL TO POST. (WWW.IDEALSHIELD.COM)

NOTE: SIGNS SHALL BE IN ACCORDANCE WITH OHIO REVISED CODE 4511.69(E), APPLICABLE CITY REGULATIONS AND THE AMERICANS WITH DISABILITIES ACT ACCESSIBILITY GUIDELINES. SIGN DESIGNATIONS ARE ACCORDING TO THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.




CONCRETE PAVEMENT

NOT TO SCALE

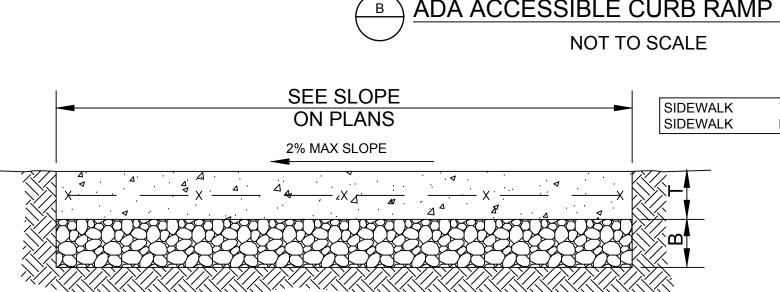


CONCRETE SIDEWALK DETAIL

NOT TO SCALE

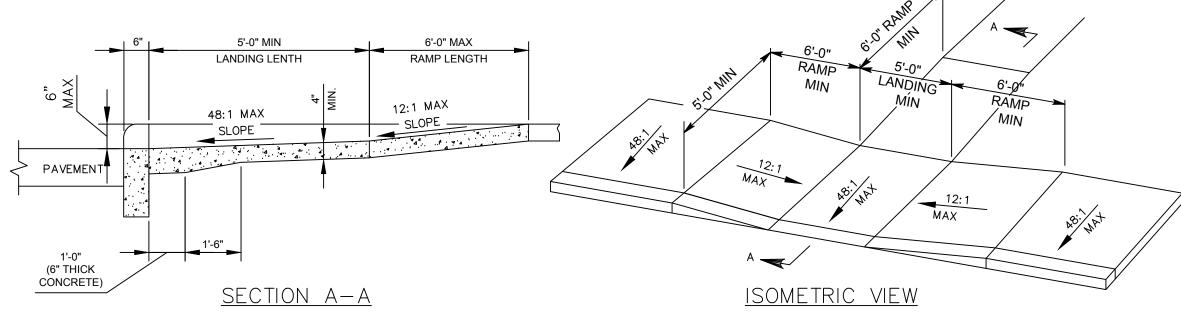

ADA ACCESSIBLE RAMP NOTES:

- 1. ALL RAMPS ARE TO BE CONSTRUCTED PER LOCAL STANDARDS
- 2. JOINTS SHALL BE PROVIDED IN THE CURB RAMP AS EXTENSIONS OF WALK JOINTS AND CONSISTENT WITH ODOT 608.03 REQUIREMENTS FOR A NEW CONCRETE WALK. A 1/2" ODOT 705.03 EXPANSION JOINT FILLER SHALL BE PROVIDED AROUND THE EDGE OF RAMPS BUILT IN EXISTING CONCRETE WALK. LINES SHOWN ON THIS DRAWING INDICATE THE RAMP EDGE AND SLOPE CHANGES AND ARE NOT NECESSARILY JOINT LINES.
- 3. CONCRETE: 4000 PSI PER ODOTS 451 & 499.

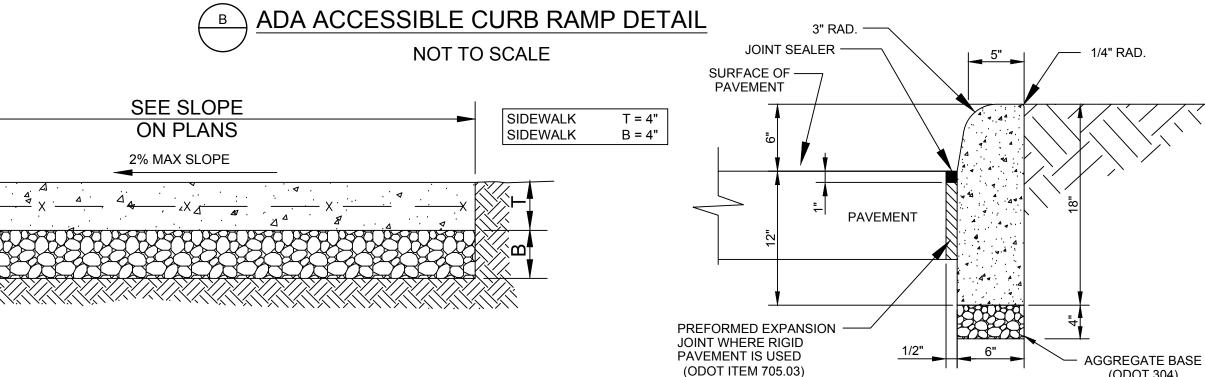




PAVEMENT LEGEND

- A. 8" REINFORCED CONCRETE (ODOT CMS 451)
- B. 10" AGGREGATE BASE (ODOT CMS 304)
- C. SUBGRADE COMPACTION (ODOT CMS 204)
- D. WELDED WIRE FABRIC MAT REINFORCEMENT (ODOT ITEM 509)
- E. 1.5" ASPHALT SURFACE COURSE (ODOT CMS 441 TYPE 1)
- F. 2.5" ASPHALT INTERMEDIATE COURSE (ODOT CMS 441 TYPE 2)
- G. TACK COAT (ODOT CMS 407)
- H. PRIME COAT (ODOT CMS 408)
- I. HOT APPLIED CRACK SEAL (ODOT CMS 702.17B)

CONCRETE SIDEWALK NOTES

- 1. USE 3/8"x 4" EXPANSION JOINTS AT CHANGE OF DIRECTIONS, CURBS, RIGID STRUCTURES, AND RIGID PAVEMENT. ON STRAIGHT RUNS PROVIDE EXPANSION JOINTS EVERY 20 FEET.
- 2. CONCRETE SIDEWALKS- USE READY-MIX CONCRETE WITH 4,000 PSI STRENGTH @ 28 DAYS.
- 3. USE REINFORCEMENT 6x 6 W1.4x W1.4 W.W.M.
- 4. TOOL ALL EXPOSED EDGES AND JOINTS TO 3/4" RADIUS.
- 5. BROOM FINISH ACROSS DIRECTION OF TRAVEL.

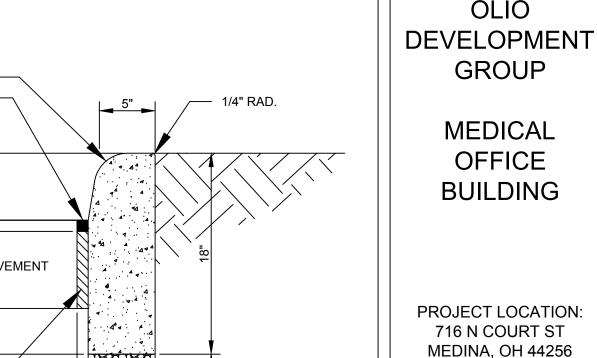

ISSUED DATE

OSBORN

ENGINEERING

130 East Chestnut St - Suite 401 | Columbus, OH 43212 614-556-4272

OLIO

GROUP

MEDICAL

OFFICE

The Osborn Engineering Company retains copyright ownership. Instruments of Service may only be used for the purpose described in the Contract. The Osborn Engineering Company may grant specific usage rights under license, and / or may transfer copyright ownership /

Unless otherwise stated in Contract,


assignment in writing. Reproduction, re-use or re-distribution of Instruments of Service is prohibited. DRAWN BY DT

WD CHECKED BY CLIENT PROJ. NO.


OSBORN PROJ. NO. J20221669.000

CONSTRUCTION **DETAILS**

DRAWING NO.

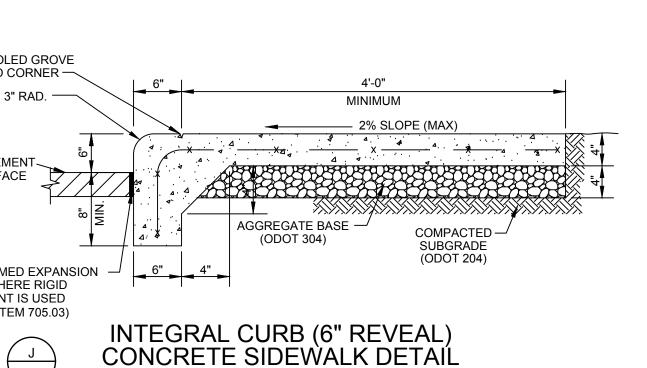

NOT TO SCALE

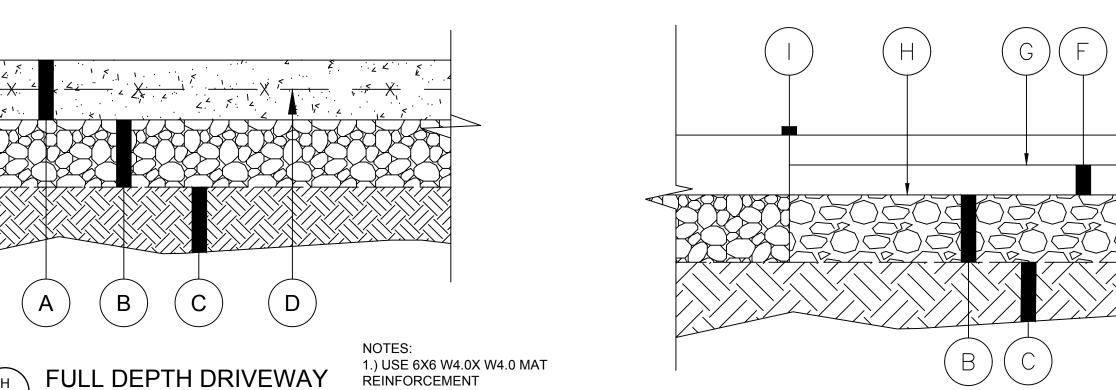

FULL DEPTH PAVEMENT REPLACEMENT SECTION DETAIL NOT TO SCALE

GENERAL NOTES

BIDDING THE WORK.

- . CONTRACTOR SHALL BE RESPONSIBLE FOR BECOMING FAMILIAR WITH DRAWINGS FOR ALL DIVISIONS OF WORK.
- 2. CONTRACTOR SHALL FAMILIARIZE HIMSELF/HERSELF WITH THE PROJECT SITE PRIOR TO
- 3. THE BASE MAPPING/SURVEY WAS PROVIDED BY "OSBORN ENGINEERING" CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND REPORT ANY DISCREPANCIES TO THE OWNER'S REPRESENTATIVE PRIOR TO COMMENCING WITH WORK.
- 4. CONTACT OHIO UTILITY PROTECTION SERVICE (OUPS) 1-800-362-2764 AND ALL LOCAL UTILITY SERVICES FOR UTILITY LOCATIONS PRIOR TO COMMENCING WITH WORK.
- . CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS PRIOR TO COMMENCING WITH WORK
- 6. THE CONTRACTOR SHALL COORDINATE ALL WORK AND BE RESPONSIBLE FOR ALL METHODS, MEANS, SEQUENCE AND PROCEDURES OF WORK.
- 7. CONTRACTOR SHALL PROVIDE ALL NECESSARY SAFETY MEASURES DURING CONSTRUCTION OPERATIONS TO PROTECT THE PUBLIC ACCORDING TO ALL APPLICABLE CODES AND RECOGNIZED LOCAL PRACTICES.
- 8. CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN ON THE DRAWINGS AS WELL AS ANY DISCOVERED DURING THE CONSTRUCTION PROCESS.
- 9. CONTRACTOR SHALL COORDINATE ACCESS AND STAGING AREAS WITH THE OWNER'S REPRESENTATIVE.
- 10. THE LIMIT OF CONSTRUCTION LINE SHOWN DEFINES THE LIMITS OF WORK IN THIS CONTRACT. THERE MAY BE INSTANCES WHERE EROSION PROTECTION DEVICES AND UTILITY SYSTEMS EXTEND BEYOND THE PROJECT LIMITS LINE IN ORDER TO SUCCESSFULLY COMPLETE OPERATIONS AND/OR TIE INTO ADJACENT SYSTEMS.
- 11. THE CONTRACTOR SHALL KEEP ALL DRAINAGE FACILITIES AFFECTED BY HIS CONSTRUCTION OPERATIONS CLEAN AND FULLY OPERATIONAL AT ALL TIMES.
- 12. MAINTAIN ALL EXISTING EROSION AND SEDIMENT CONTROL MEASURES (SILT FENCE, ORANGE GEO FENCE AND/OR OTHER MEASURES) DURING CONSTRUCTION. PROVIDE ADDITIONAL MEASURES AS NECESSARY TO MINIMIZE ADVERSE IMPACTS TO THE ADJACENT WATER BODIES, SURFACES AND STORM SEWERS ACCORDING TO ALL APPLICABLE FEDERAL/STATE LAWS AND REGULATIONS.
- 13. CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO COMMENCING WITH WORK. NOTIFY OWNER'S REPRESENTATIVE OF ANY DISCREPANCY BETWEEN THE PLANS AND ACTUAL SITE CONDITIONS. NO WORK SHALL BE DONE IN AREAS WHERE SUCH DISCREPANCIES EXIST. THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR ALL NECESSARY REVISIONS DUE TO FAILURE TO GIVE SUCH NOTIFICATION.
- 14. REPORT ALL EXISTING DAMAGE OF EXISTING SITE IMPROVEMENTS TO THE OWNER'S REPRESENTATIVE PRIOR TO BEGINNING WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL SUBSEQUENT DAMAGE.
- 15. CONTRACTOR SHALL PROTECT, BY WHATEVER MEANS NECESSARY, THE EXISTING SITE IMPROVEMENTS TO REMAIN. ALL DAMAGED ITEMS SHALL BE REPLACED OR REPAIRED AT NO ADDITIONAL COST TO THE OWNER. NOTIFY OWNER'S REPRESENTATIVE IMMEDIATELY IF ANY DAMAGE OCCURS.
- 16. ALL AREAS WITHIN THE DRIPLINES OF EXISTING TREES SHALL REMAIN FREE OF CONSTRUCTION MATERIALS, DEBRIS, VEHICLES AND FOOT TRAFFIC AT ALL TIMES. CONTRACTOR SHALL PROVIDE TEMPORARY FENCING, BARRICADES AND/OR OTHER SUITABLE GUARDS OUTSIDE DRIP LINE (OUTSIDE PERIMETER OF BRANCHES) TO PROTECT TREES AND PLANT MATERIAL TO REMAIN. NO WORK SHALL BE PERFORMED WITHIN THE DRIPLINE OF EXISTING TREES UNLESS INDICATED. ALL WORK INDICATED TO BE PERFORMED WITHIN THE DRIPLINE OF TREES SHALL BE DONE BY HAND AND CARE SHALL BE TAKEN TO MINIMIZE DISTURBANCE TO THE TREE ROOTS.
- 17. CONTRACTORS SHALL COORDINATE ALL WORK WITH RELATED TRADES AND THE GENERAL CONSTRUCTION OF THE PROJECT SO AS NOT TO IMPEDE THE PROGRESS OF THE WORK OF OTHERS OR THE CONTRACTORS OWN WORK.
- 18. EACH CONTRACTOR SHALL VERIFY THE CONDITION AND COMPLETENESS OF ALL WORK PERFORMED BY OTHERS IN RELATION TO HIS/HER PROJECT WORK RESPONSIBILITIES INCLUDING THE CHECKING OF EXISTING ELEVATIONS OR STRUCTURES PRIOR TO INITIATING CONSTRUCTION. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE OWNER'S REPRESENTATIVE IF ANY SITE CONDITIONS ARE INCOMPLETE, MISSING OR DAMAGED.
- 19. ALL CONSTRUCTION DEBRIS AND REMOVED ITEMS SHALL BE DISPOSED OF LEGALLY OFF-SITE UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
- 20. NOTIFY OWNER'S REPRESENTATIVE 72 HOURS IN ADVANCE OF ANY PLANNED UTILITY INTERRUPTION.

- 21. CONTRACTOR SHALL CLEAN THE WORK AREAS AT THE END OF EACH WORKING DAY. ALL MATERIALS, PRODUCTS AND EQUIPMENT SHALL BE STORED IN AN ORGANIZED FASHION.
- 22. THE PLANS ASSUME THAT THE LAYOUT AND STAKING WILL BE ACCOMPLISHED USING TOTAL STATIONING / DIGITAL METHODS. ANY INFORMATION PROVIDED IS INTENDED TO SUPPORT INFORMATION ALREADY CONTAINED IN CAD FILES USED FOR DOCUMENTING LAYOUT AND STAKING. CAD FILES DELINEATING ALL GRADING AND HARDSCAPE ELEMENTS SHOWN IN THESE PLANS CAN BE PROVIDED TO THE CONTRACTOR UPON REQUEST.
- 23. CONTRACTOR SHALL EMPLOY SKILLED PERSONNEL AND USE EQUIPMENT NECESSARY TO ENSURE THAT ALL WORK IS PROFESSIONALLY AND PROPERLY INSTALLED AND IN FULL COMPLIANCE WITH THE PLANS AND DETAILS.
- 24. CONTRACTOR SHALL COMPLY WITH STATE AND LOCAL LAWS AND REGULATIONS REGARDING NOTIFICATION OF EXISTING GAS AND OIL PIPELINE COMPANY OWNERS. EVIDENCE OF SUCH NOTICE SHALL BE FURNISHED TO THE OWNER'S REPRESENTATIVE PRIOR TO COMMENCING WITH WORK.

LANDSCAPE NOTES

- STAKE ALL BED LINES AND TREE LOCATIONS FOR THE LANDSCAPE ARCHITECT'S REVIEW PRIOR TO INSTALLATION. ALL PLANTING PROCEDURES ARE SUBJECT TO THE REVIEW OF THE LANDSCAPE ARCHITECT AND THE CONTRACTOR SHALL CORRECT ANY DEFICIENCIES FOUND AT NO ADDITIONAL COST TO THE OWNER.
- 2. SECURE PLANT MATERIAL AS SPECIFIED ON PLANS. IN THE EVENT THAT PLANT MATERIALS SPECIFIED ARE NOT AVAILABLE, CONTACT LANDSCAPE ARCHITECT FOR APPROVED SUBSTITUTIONS. NO SUBSTITUTIONS FOR PLANT MATERIALS WILL BE ALLOWED WITHOUT PRIOR WRITTEN APPROVAL BY THE LANDSCAPE ARCHITECT.
- 3. VERIFY THAT ALL PLANTING PRODUCTS, PLANT MATERIAL, AND PLANT QUANTITIES DELIVERED TO THE SITE MATCH WHAT IS INDICATED ON THE PLANS AND SPECIFICATIONS.
- PROTECT ALL PLANT MATERIAL DURING DELIVERY TO PREVENT DAMAGE TO ROOT BALLS, TRUNKS, BRANCHES AND THE DESICCATION OF LEAVES. PROTECT ALL PLANT MATERIAL DURING SHIPPING WITH SHADE CLOTH OR SHIP WITH ENCLOSED TRANSPORT. MAINTAIN PROTECTIONS AND HEALTH OF PLANT MATERIAL STORED ON SITE. HANDLE ALL TREES WITH NYLON STRAPS. NO CHAINS OR CABLES WILL BE ALLOWED. REMOVE UNACCEPTABLE PLANT MATERIAL IMMEDIATELY FROM THE SITE.
- 5. ALL PLANT MATERIAL SHALL BE NURSERY GROWN, WELL FORMED, TRUE TO SPECIES, HARDENED OFF WITH VIGOROUS ROOT SYSTEMS, FULL CROWN AND CANOPIES, AND FREE FROM DISEASE, PESTS AND INSECTS, AND DEFECTS SUCH AS KNOTS, SUN SCALD, WINDBURN, LEAF DIS-COLORATION, IRREGULAR BRANCHING OR INJURIES.
- 6. ALL ROOT BALLS SHALL CONFORM TO THE SIZE STANDARDS SET FORTH IN "AMERICAN STANDARDS FOR NURSERY STOCK".
- 7. ALL PLANT MATERIAL DELIVERED TO THE SITE IS SUBJECT TO THE REVIEW OF THE LANDSCAPE ARCHITECT BEFORE, DURING AND AFTER INSTALLATION.
- 8. PROVIDE PLANT SAMPLES OR PHOTOGRAPHS OF EACH PLANT SPECIFIED TO THE LANDSCAPE ARCHITECT FOR COMPLIANCE REVIEW PRIOR TO INSTALLATION.
- 9. TEST FILL ALL TREE AND PLANTING PITS WITH WATER, PRIOR TO PLANTING, TO ASSURE PROPER SOIL PERCOLATION. PITS WHICH DO NOT ADEQUATELY DRAIN SHALL BE FURTHER EXCAVATED TO A DEPTH SUFFICIENT FOR DRAINAGE TO OCCUR AND/OR BACKFILLED WITH SUITABLE DRAINAGE GRAVEL. NO ALLOWANCES SHALL BE MADE FOR PLANT MATERIAL LOSS DUE TO IMPROPER DRAINAGE. CONTRACTOR SHALL REPLACE LOST PLANT MATERIAL WITH SAME SIZE AND SPECIES AT NO ADDITIONAL COST TO OWNER.
- 10. ALL PLANT MATERIALS, INCLUDING RELOCATED PLANT MATERIAL, SHALL BE PLANTED IN A PROFESSIONAL MANNER TYPICAL TO THE INDUSTRY STANDARDS OF THE AREA TO ASSURE COMPLETE SURVIVABILITY OF ALL INSTALLED PLANT MATERIALS AS WELL AS TO PROVIDE AN AESTHETICALLY APPROVED PROJECT. CONTRACTOR SHALL REFER TO THE PLANTING DETAILS FOR MINIMUM SIZE AND WIDTH OF PLANTING PITS AND BEDS, GUYING AND STAKING, MULCHING, AND OTHER PLANTING REQUIREMENTS.
- 11. ALL PLANTING AREAS SHALL BE WEED FREE PRIOR TO PLANTING INSTALLATION.
- 12. REMOVE ALL PLANTING AND LANDSCAPE DEBRIS FROM THE PROJECT SITE AND SWEEP AND WASH CLEAN ALL PAVED AND FINISHED SURFACES AFFECTED BY THE LANDSCAPE INSTALLATION.
- 13. REFER TO GENERAL NOTES FOR ADDITIONAL INSTRUCTIONS.

GRADING NOTES

1. BOUNDARY.TOPOGRAPHIC AND UTILITY SURVEY WAS PREPARED BY:

OSBORN ENGINEERING 130 E CHESTNUT STREET SUITE 401 COLUMBUS, OHIO 43215 P 614.556.4272

- 2. BENCHMARKS SEE ENGINEERS PLANS FOR BENCHMARKS.
- 3. CONTRACTOR SHALL VERIFY GRADES AND NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPENCIES.
- 4. MAXIMUM SLOPE SHALL BE 4:1.
- 5. THE CONTRACTOR SHALL USE THE LAYOUT AND MATERIALS PLAN FOR ADDITIONAL SITE DIMENSIONS AND INFORMATION.
- 6. WHERE PROPOSED GRADING MEETS EXISTING, CONTRACTOR SHALL BLEND GRADES TO PROVIDE A SMOOTH TRANSITION BETWEEN EXISTING AND NEW WORK.
- 7. CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE IN ALL AREAS.
- 8. ALL GRADES SHOWN ARE FINISHED TOPSOIL GRADES, AND HAVE BEEN ADJUSTED TO ACCOUNT FOR SOD AND MULCH PROFILES
- 9. THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING WORK AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.
- 10. ALL EXISTING PLANT MATERIAL SHOWN ON THIS PLAN SHALL BE PRESERVED UNLESS SPECIFICALLY NOTED OTHERWISE.
- 11. SEE REPORT OF SUBSURFACE EXPLORATION AND FOUNDATION RECOMMENDATIONS IF AVAILABLE FOR ADDITIONAL REQUIREMENTS OF GRADING OPERATIONS.
- 12. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING INLET PROTECTION FOR ALL DRAIN INLETS WITHIN THE LIMITS OF GRADING. SEE GRADING SHEET FOR MORE INFORMATION.
- 13. ALL AREAS DISTURBED BY GRADING OPERATIONS OUTSIDE BUILDING
 AND PAVEMENT AREAS ARE TO BE FINE GRADED AND SEEDED OR SODDED BY
 LANDSCAPE CONTRACTOR. SEE LANDSCAPE PLANS FOR MORE INFORMATION.

LAYOUT NOTES

- 1. ALL DIMENSIONS SHOWN ARE IN FEET AND INCHES UNLESS OTHERWISE NOTED.
- 2. DO NOT SCALE DRAWINGS. UTILIZE DIMENSIONS INDICATED ON THE PLANS.
- 3. ALL DIMENSIONS ARE TO THE EDGE OF PAVEMENT, FACE OF WALL, OR FACE OF CURB UNLESS OTHERWISE NOTED.
- 4. WALKWAYS AND HARDSCAPE ELEMENTS INDICATED AS CURVILINEAR SHALL HAVE SMOOTH CONTINUOUS CURVES.
- 5. UNLESS INDICATED OTHERWISE, ALL WALKWAYS ABUT AT 90 DEGREE ANGLES.
- 6. ALL CONCRETE SCORING SHALL BE PARALLEL, PERPENDICULAR OR TANGENT TO ADJACENT IMPROVEMENTS UNLESS OTHERWISE NOTED.
- 7. LAYOUT ALL CONSTRUCTION LINES AND VERIFY LAYOUT WITH THE OWNER'S REPRESENTATIVE PRIOR TO BEGINNING ANY CONSTRUCTION WORK.
- 8. RADII OF CURBS ARE ESTIMATED FROM SURVEY OR BASE DATA. THE CONTRACTOR SHALL MAKE ALL MODIFICATIONS NECESSARY TO ASSURE EXISTING AND NEW CURBS MEET FLUSH, EVEN AND SMOOTHLY.
- 9. PROVIDE ISOLATION JOINTS WHERE CONCRETE PAVING OR PAVING BASE MEETS A FIXED STRUCTURE (EXISTING AND PROPOSED).
- 10. PROVIDE FLUSH CONDITIONS AT JUNCTURE OF ALL WALKWAYS AND DOOR THRESHOLDS.
- 11. REFER TO GENERAL NOTES FOR ADDITIONAL INSTRUCTIONS.



VICINITY MAP

ISSUED FOR	DATE
DESIGN REVIEW	03.23.2023

SHEET INDEX - LANDSCAPE PLANS

L0.00 - LANDSCAPE TITLE SHEET

L1.00 - SITE LANDSCAPE PLAN

L2.00 - BUILDING ENLARGEMENT LANDSCAPE PLAN

L3.00 - LANDSCAPE DETAILS I

OLIO DEVELOPMENT GROUP



SEAL

PROJECT FOR:

CHECK SET Not For Construction

DESIGN TEAM

Civil Engineer

Osborn Engineering
130 E Chestnut Street

Landscape Architect

ARE

p 614.556.4272

Columbus, Ohio 43215

G2 Planning and Design 720 E. Broad St. Suite 200 Columbus, Ohio 43215 p 614.583.9230

> 716 N Court St Medina, OH 44256 Prepared for:

Z

 \Box


REVISIONS

	date	issued for	
<u>1</u>			
\triangle			
1	XX.XX.XXXX	NOTES	

drawn by: AS checked by: PEM issue date 03.23.2023 PROJECT NO. 23024

LANDSCAPE TITLE SHEET

L0.00

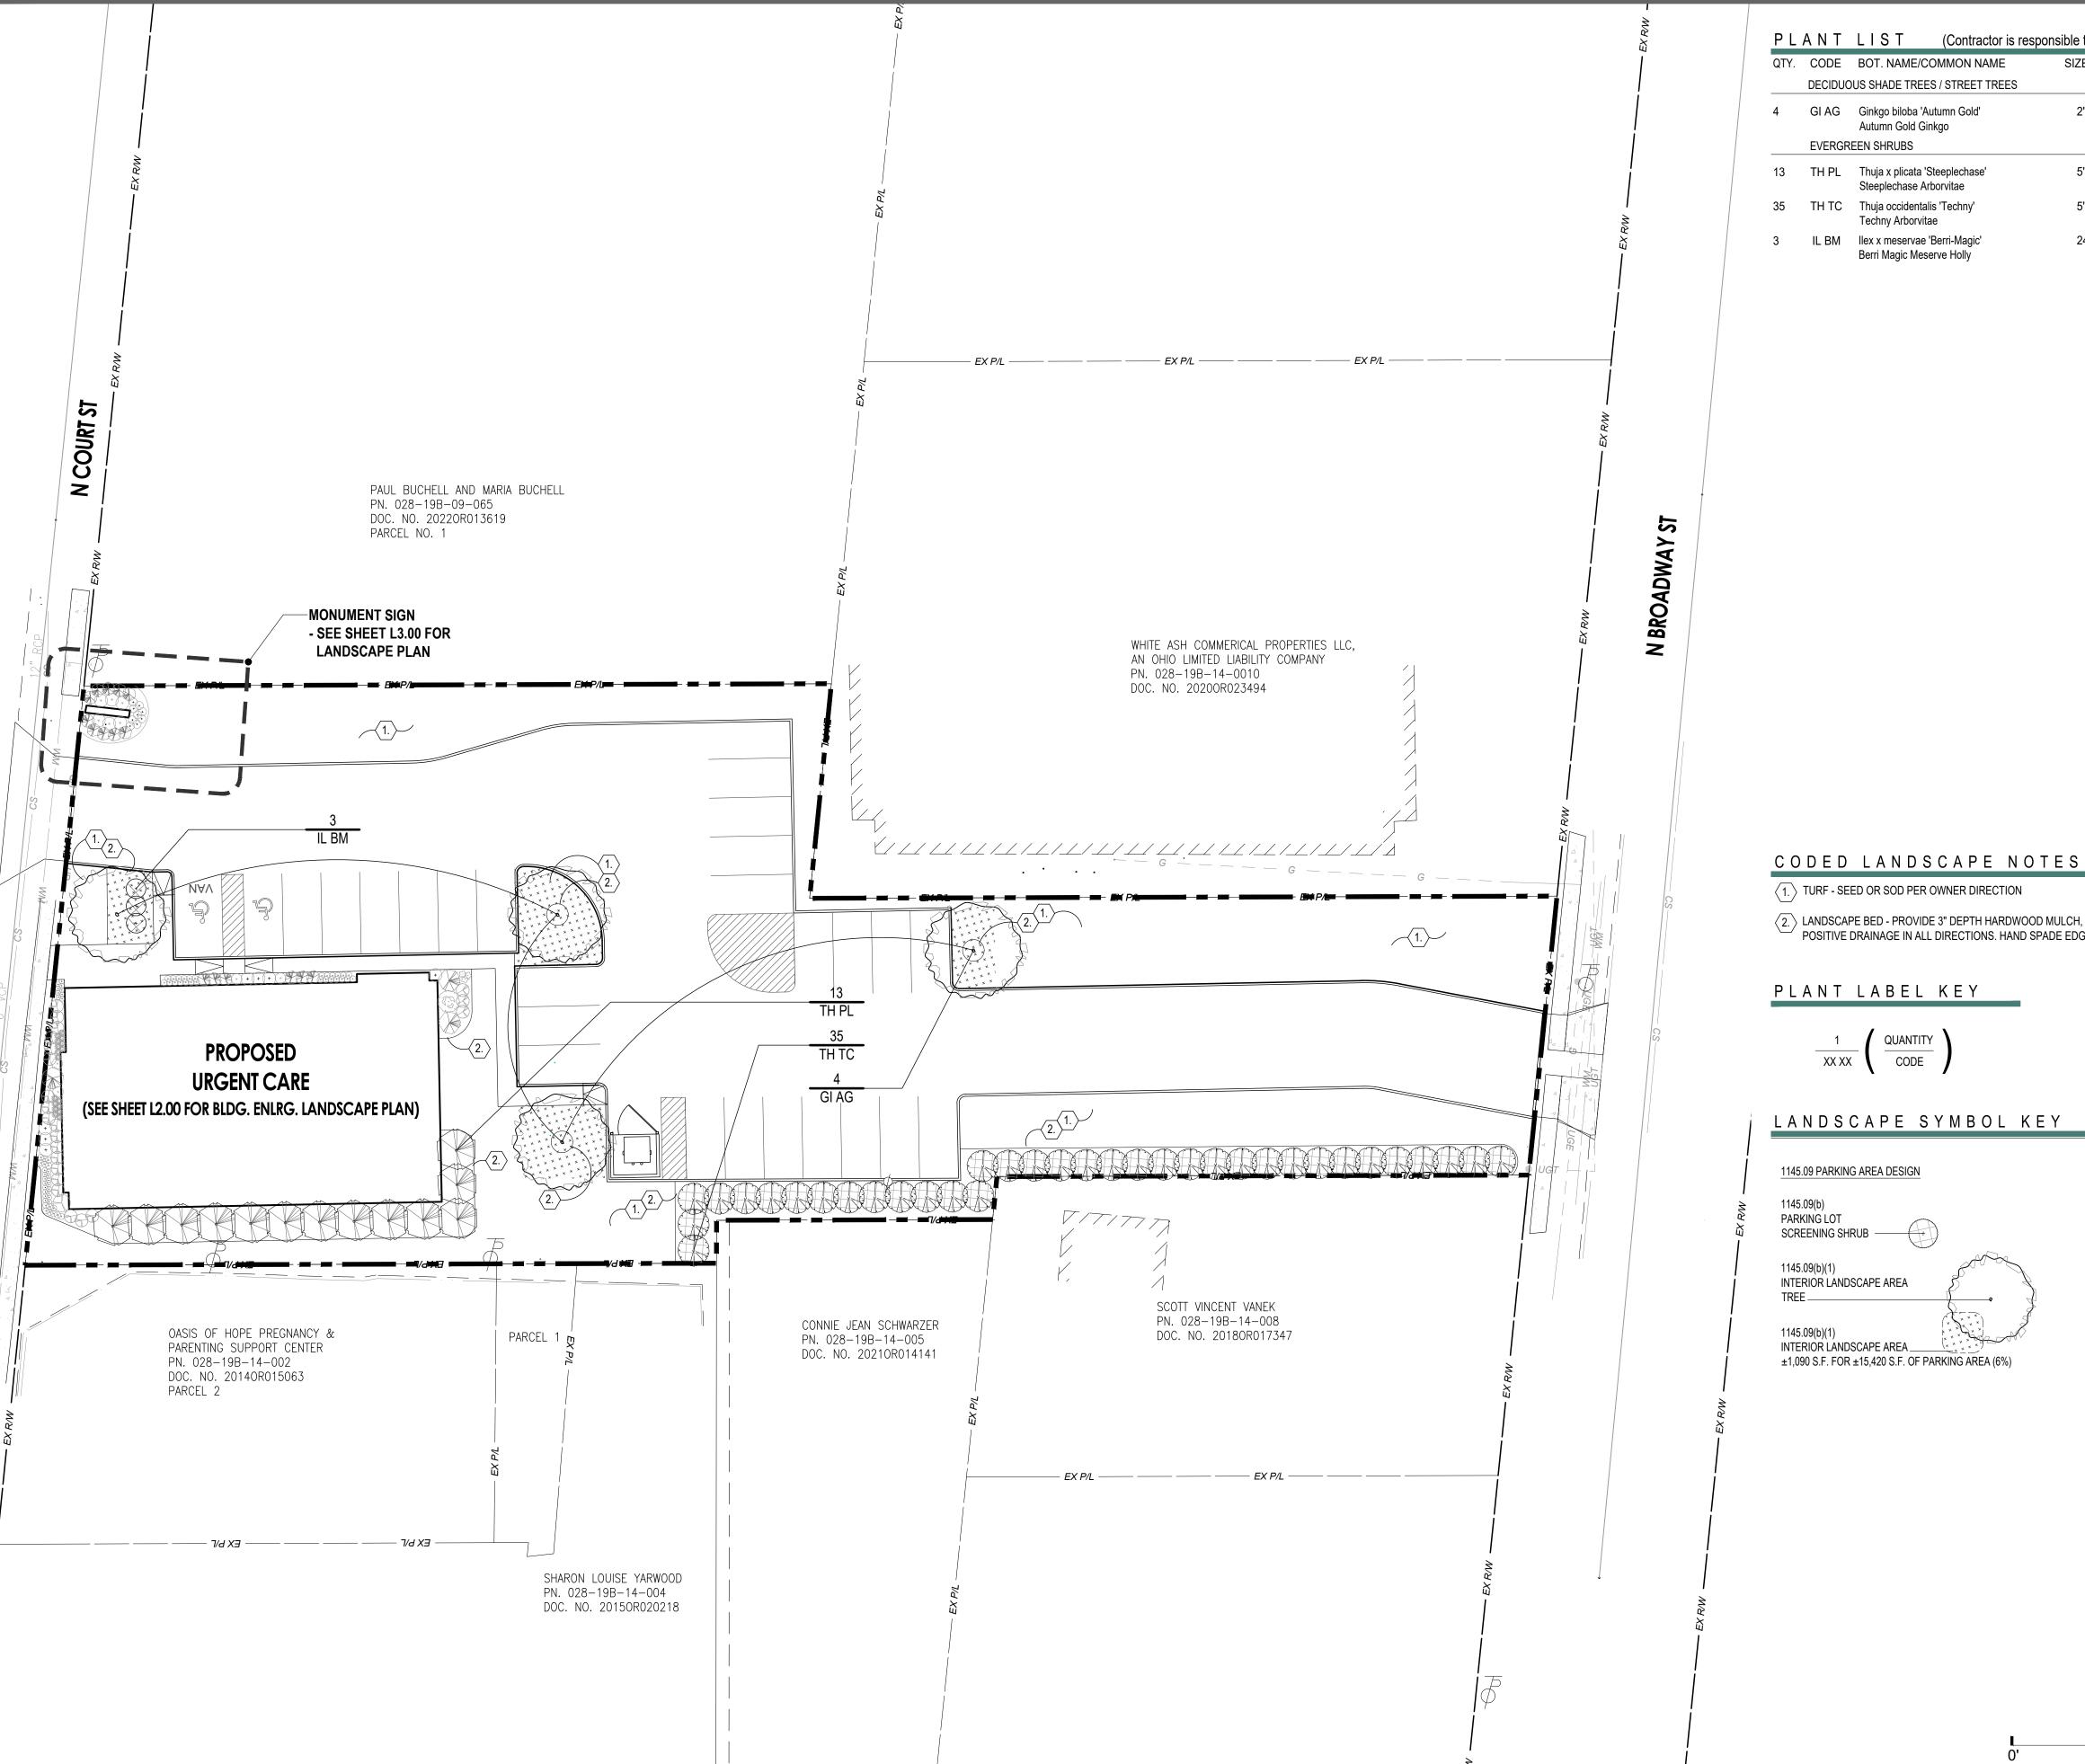

PLANT LIST (Contractor is responsible to provide all plant quantities shown on plan) QTY. CODE BOT. NAME/COMMON NAME DECIDUOUS SHADE TREES / STREET TREES 4 GI AG Ginkgo biloba 'Autumn Gold' 2" CAL. AS SHOWN Match Form B&B Autumn Gold Ginkgo **EVERGREEN SHRUBS** 13 TH PL Thuja x plicata 'Steeplechase' 5' HT. B&B 6' O.C. Steeplechase Arborvitae 6' O.C. 35 TH TC Thuja occidentalis 'Techny' 5' HT. B&B Techny Arborvitae PER PLAN 3 IL BM Ilex x meservae 'Berri-Magic' 24" HT. Berri Magic Meserve Holly

 $\langle 1. \rangle$ TURF - SEED OR SOD PER OWNER DIRECTION

igg(2.igg) LANDSCAPE BED - PROVIDE 3" DEPTH HARDWOOD MULCH, POSITIVE DRAINAGE IN ALL DIRECTIONS. HAND SPADE EDGE.

PLANT LABEL KEY

1 XX XX $\frac{\text{QUANTITY}}{\text{CODE}}$

LANDSCAPE SYMBOL KEY

1145.09 PARKING AREA DESIGN

SCREENING SHRUB

INTERIOR LANDSCAPE AREA _ ±1,090 S.F. FOR ±15,420 S.F. OF PARKING AREA (6%)

1149.05 LANDSCAPING AND SCREENING STD.S

1149.05 (c)

LAND USÉ SCREENING SHRUB — **REVISIONS**

716 N Medina,

PROJECT FOR:

DESIGN TEAM

Civil Engineer

Osborn Engineering 130 E Chestnut Street

Suite 401 Columbus, Ohio 43215

Landscape Architect

ARE

G2 Planning and Design 720 E. Broad St. Suite 200 Columbus, Ohio 43215 p 614.583.9230

p 614.556.4272

OLIO

DEVELOPMENT GROUP

CHECK SET Not For Construction


PLANNING + DESIGN

drawn by: AS checked by: PEM issue date 03.23.2023 PROJECT NO. 23024

XX.XX.XXXX NOTES

SITE LANDSCAPE PLAN

L1.00

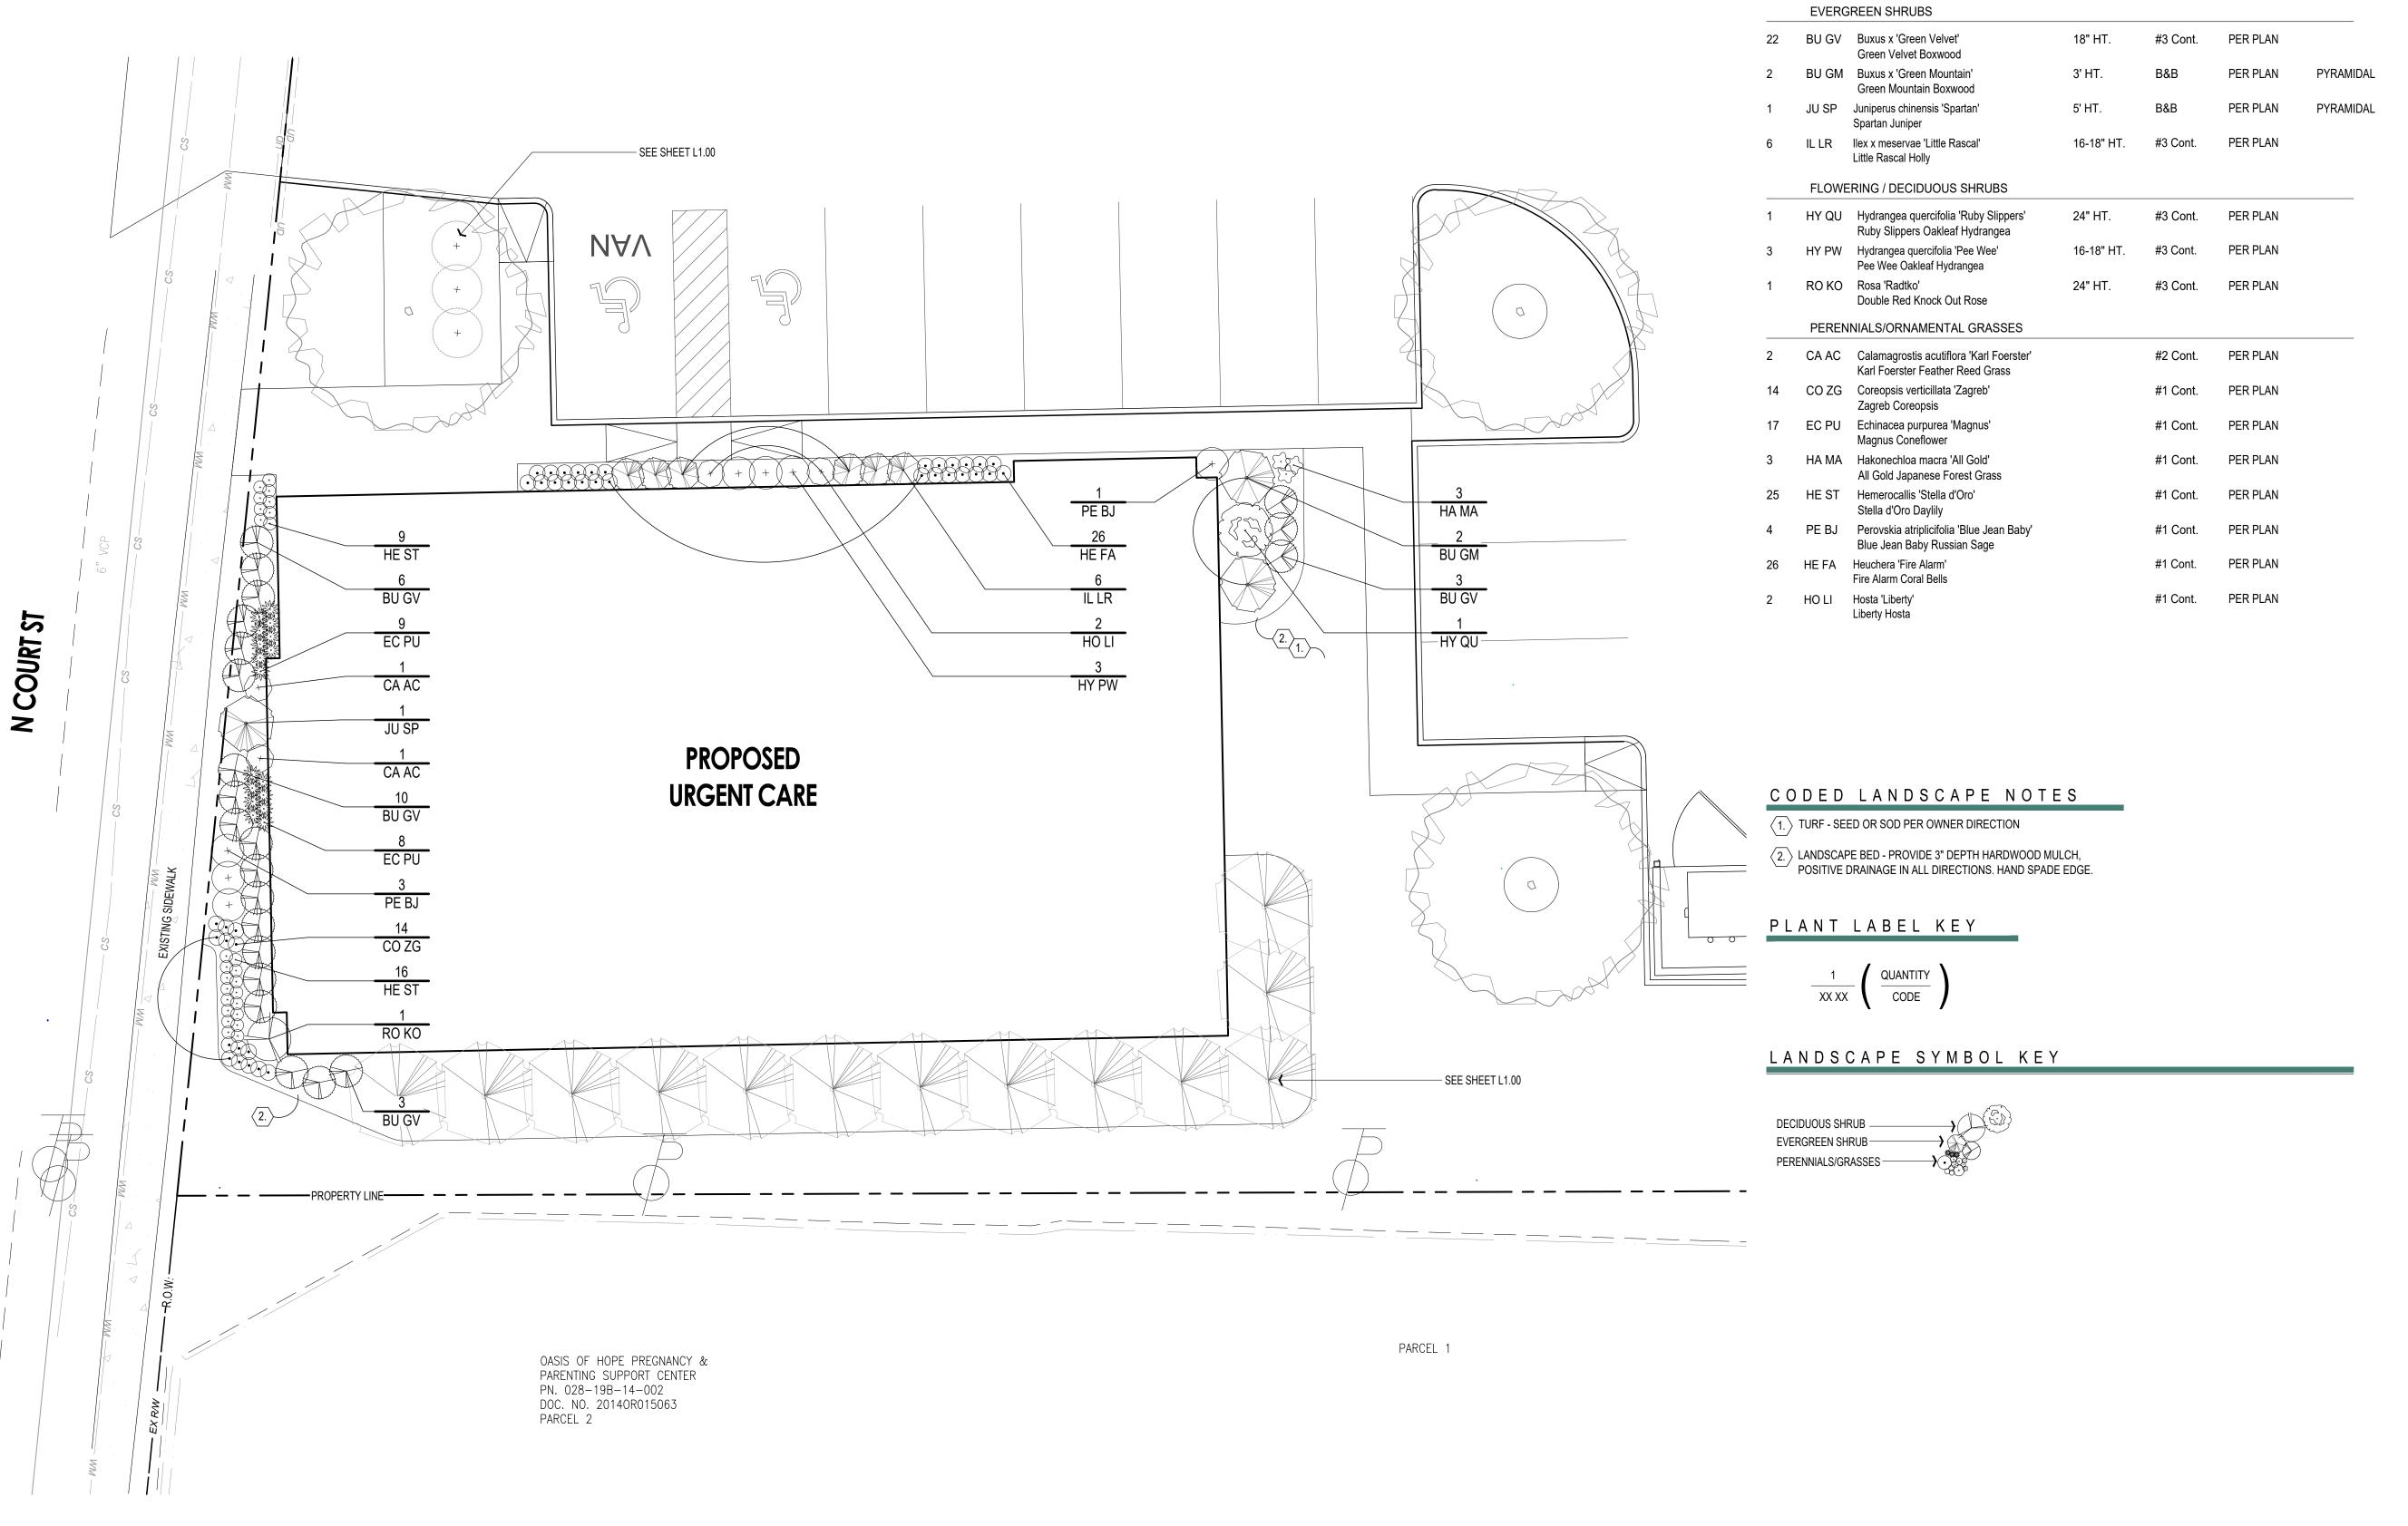

PROJECT FOR:

PLANT LIST (Contractor is responsible to provide all plant quantities shown on plan)

COND.

SPACING NOTES

QTY. CODE BOT. NAME/COMMON NAME

OLIO **DEVELOPMENT GROUP**



CHECK SET Not For Construction

DESIGN TEAM Civil Engineer Osborn Engineering 130 E Chestnut Street

Suite 401 Columbus, Ohio 43215 p 614.556.4272 Landscape Architect

G2 Planning and Design 720 E. Broad St. Suite 200 Columbus, Ohio 43215 p 614.583.9230

ORN ENGINEERING

ARE 716 N Medina,


REVISIONS


XX.XX.XXXX NOTES

drawn by: AS issue date 03.23.2023 PROJECT NO. 23024

BUILDING ENLRG. LANDSCAPE PLAN

L2.00

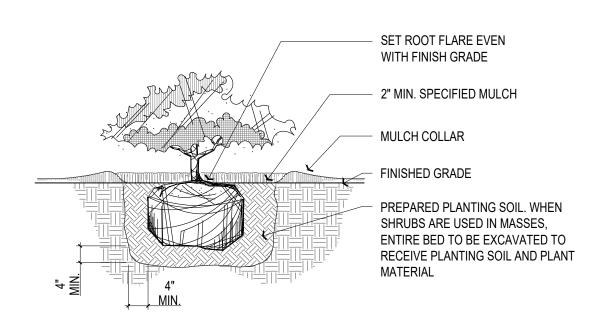


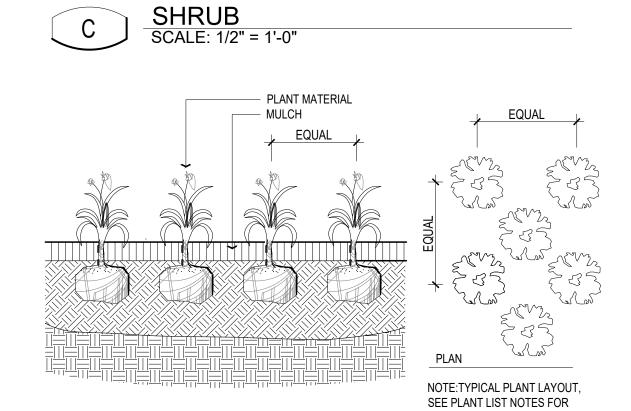



WIRE WITH TREE STRAPS - WIRE IS TWISTED — AT THE TIME OF INSTALLATION, BUT NOT TO THE POINT OF A RIGID LINE. THE TREE SUPPORTS SHOULD ALLOW SOME STEM MOVEMENT. 2" X 2" X 8' OPPOSING WOOD — STAKES IN LINE WITH PREVAILING SUMMER WIND STAKING PLAN DETAIL — DO NOT CUT MAIN LEADER THE AMOUNT OF TREE AND SHRUB PRUNING SHALL BE LIMITED TO THE MINIMUM NECESSARY TO REMOVE DEAD OR INJURED TWIGS & BRANCHES. RETAIN NORMAL SHAPE. PLANT TREES AND EVERGREENS SO THE ROOT FLARE IS 2-3" ABOVE FINISH GRADE *DIG PLANTING HOLE TWICE THE DIAMETER OF THE ROOTBALL- BACKFILL - NO STAKING SUPPORTS WITH MIXTURE 4 PARTS NATIVE SOIL AND 1 PART ORGANIC SOIL CONDITIONER (LEAF COMPOST). PULVERIZE OR CHOP SOIL TO REMOVE TO BE INSTALLED IN THE CLODS AND CLUMPS TREE ROOT BALL. INSTALL IN UNDISTURBED OR COMPACTED SOIL OUTSIDE PLANTING HOLE. WIRE WITH TREE STRAPS. TWO STRAPS -PER TREE, ATTACH AT 1/3 THE HEIGHT OF TREE - SET ROOT FLARE 2-3" ABOVE FINISH GRADE 2" X 2" X 8' WOOD STAKE, - SEE PLAN DETAIL ABOVE - MULCH COLLAR SET ROOT BALL ON RAISED PEDESTAL OF COMPACTED OR UNDISTURBED SOIL - REMOVE TOP 1/3 (12" MIN.) OF BURLAP AND TWINE

EVERGREEN TREE

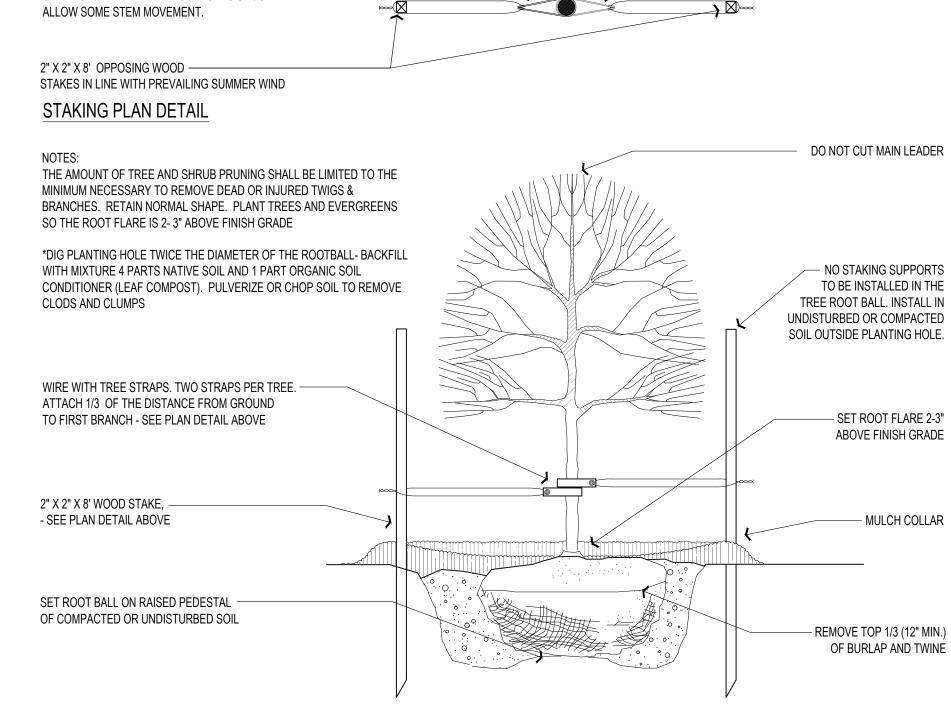

WIRE WITH TREE STRAPS - WIRE IS TWISTED —

OF A RIGID LINE. THE TREE SUPPORTS SHOULD

AT THE TIME OF INSTALLATION, BUT NOT TO THE POINT

DECIDUOUS TREE

SCALE: 1" = 1'-0"

PL	P L A N T L I S T (Contractor is responsible to provide all plant quantities shown on plan)					
QTY.	CODE	BOT. NAME/COMMON NAME	SIZE	COND.	SPACING	NOTES
	EVERG	REEN SHRUBS				
10	JU SQ	Juniperus squamata 'Blue Star' Blue Star Juniper	18" SPRD	#3 Cont.	AS SHOWN	
	PERENNIALS, GRASSES AND GROUNDCOVERS					
9	CA AC	Calamagrostis acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass		#2 Cont.	PER PLAN	
6	PE BJ	Perovskia atriplicifolia 'Blue Jean Baby' Blue Jean Baby Russian Sage		#1 Cont.	PER PLAN	

CODED LANDSCAPE NOTES

2. LANDSCAPE BED - PROVIDE 3" DEPTH HARDWOOD MULCH, POSITIVE DRAINAGE IN ALL DIRECTIONS. HAND SPADE EDGE.


1. TURF - SEED OR SOD PER OWNER DIRECTION

PLANT LABEL KEY: $\frac{1}{XXXX} \left(\frac{QUANTITY}{CODE} \right)$

NOTE: FIELD VERIFY LOCATION AND DEPTHS OF ALL UTILITIES. HAND EXCAVATE ALL PLANTING PITS.

MONUMENT SIGN LANDSCAPE PLAN

SCALE: 1/4" = 1'

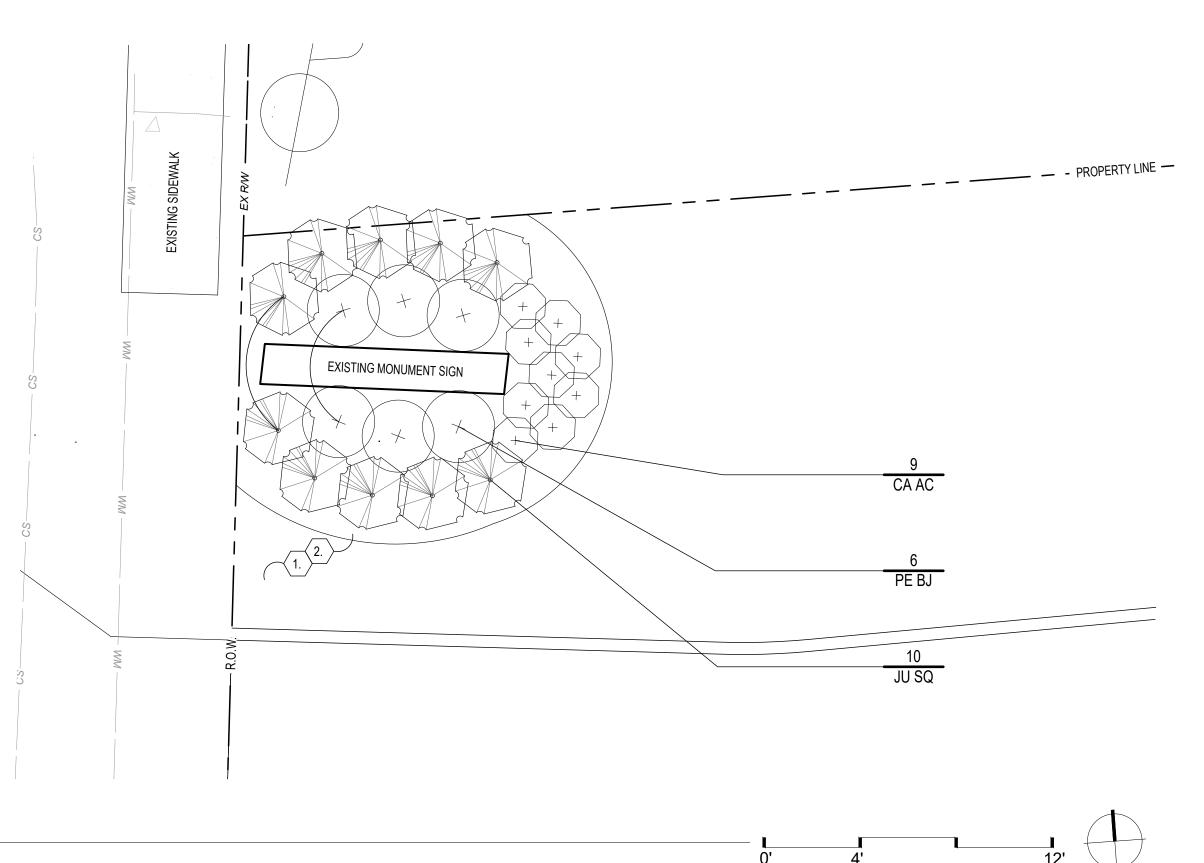

PROJECT FOR:

OLIO **DEVELOPMENT GROUP**



SEAL

CHECK SET Not For Construction

DESIGN TEAM

Civil Engineer

Osborn Engineering 130 E Chestnut Street Suite 401 Columbus, Ohio 43215 p 614.556.4272

Landscape Architect

G2 Planning and Design 720 E. Broad St. Suite 200 Columbus, Ohio 43215 p 614.583.9230

716 N ledina,

REVISIONS


	date	issued for
/		
/		
/		
/		
/		
/		
	XX.XX.XXXX	NOTES
<u>L \</u>	^^.^.	NOTES

issue date 03.23.2023 PROJECT NO. 23024


LANDSCAPE **DETAILS I**

L3.00



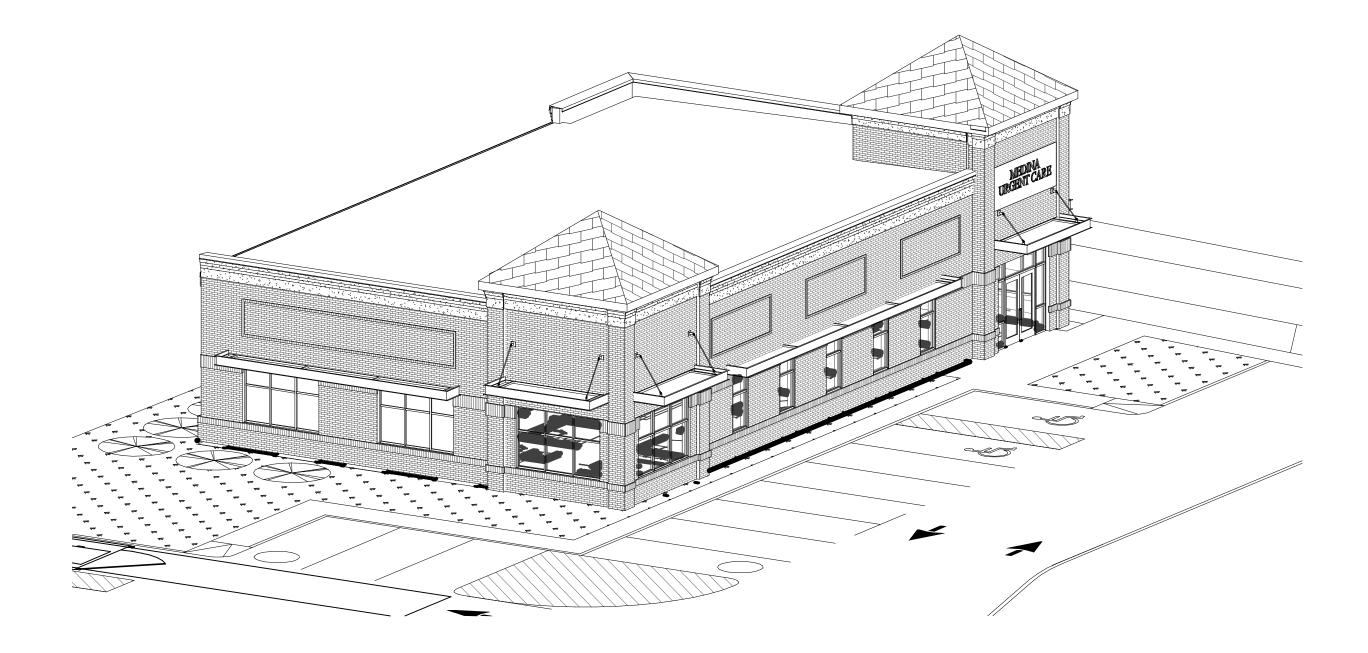




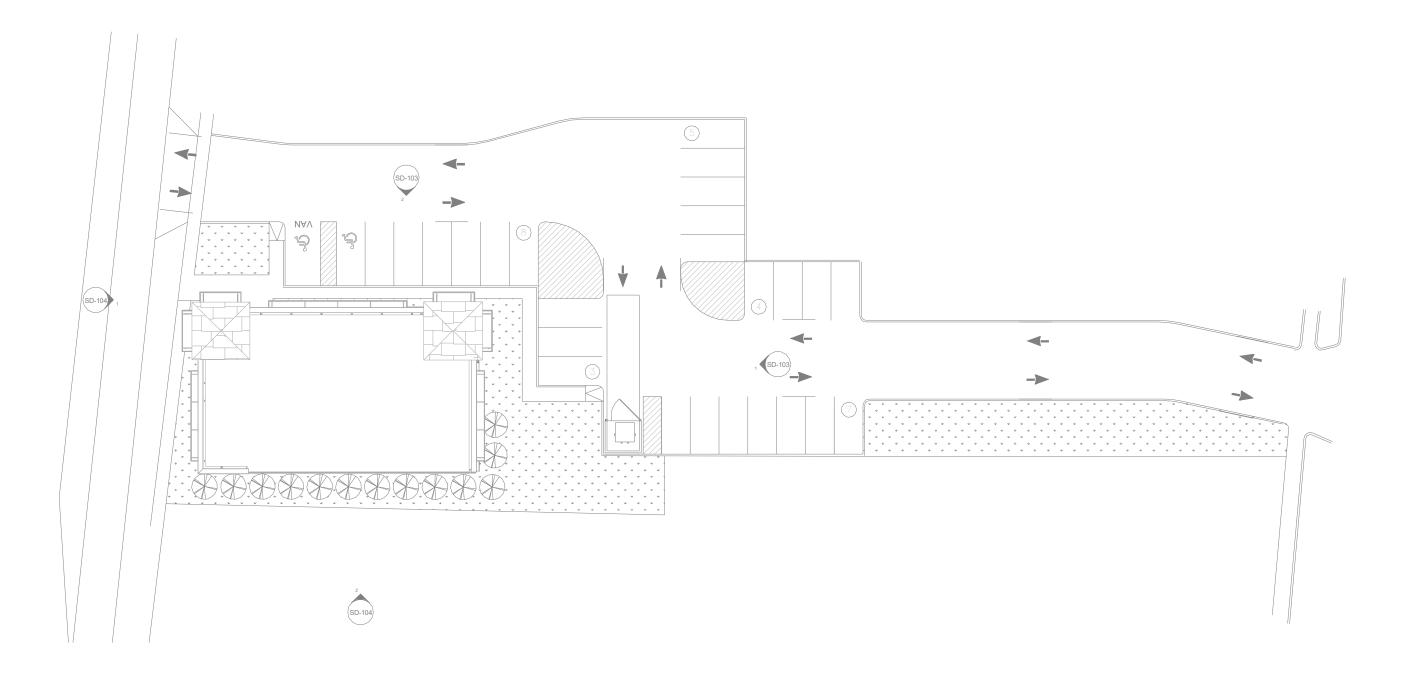


PROPOSED SITE PLAN
1" = 30'-0"



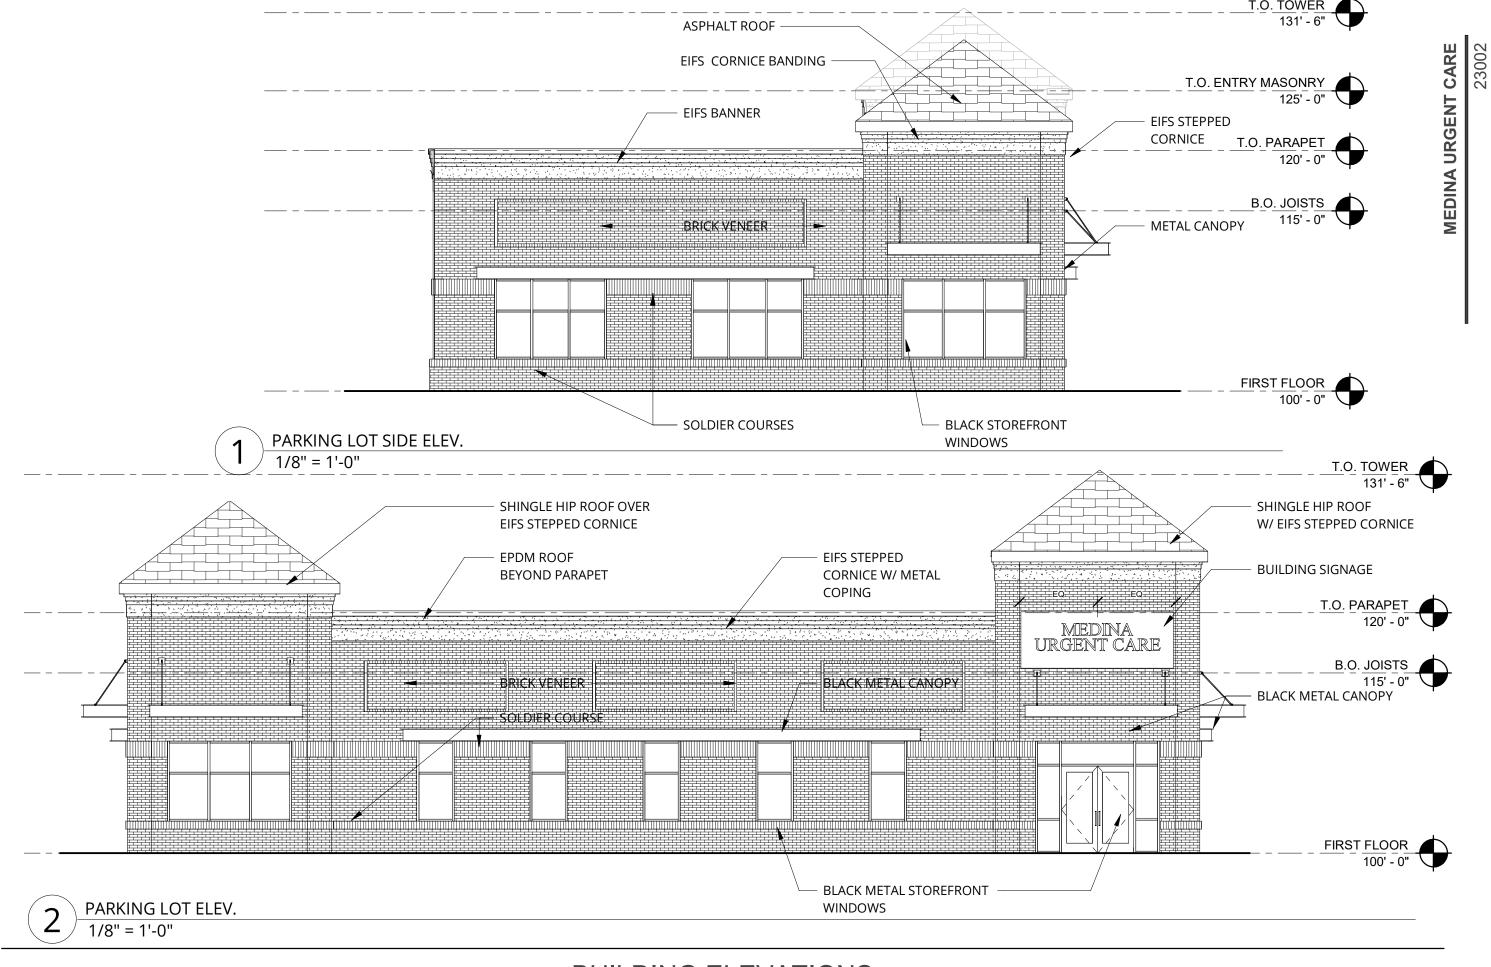




BUILDING ELEVATIONS

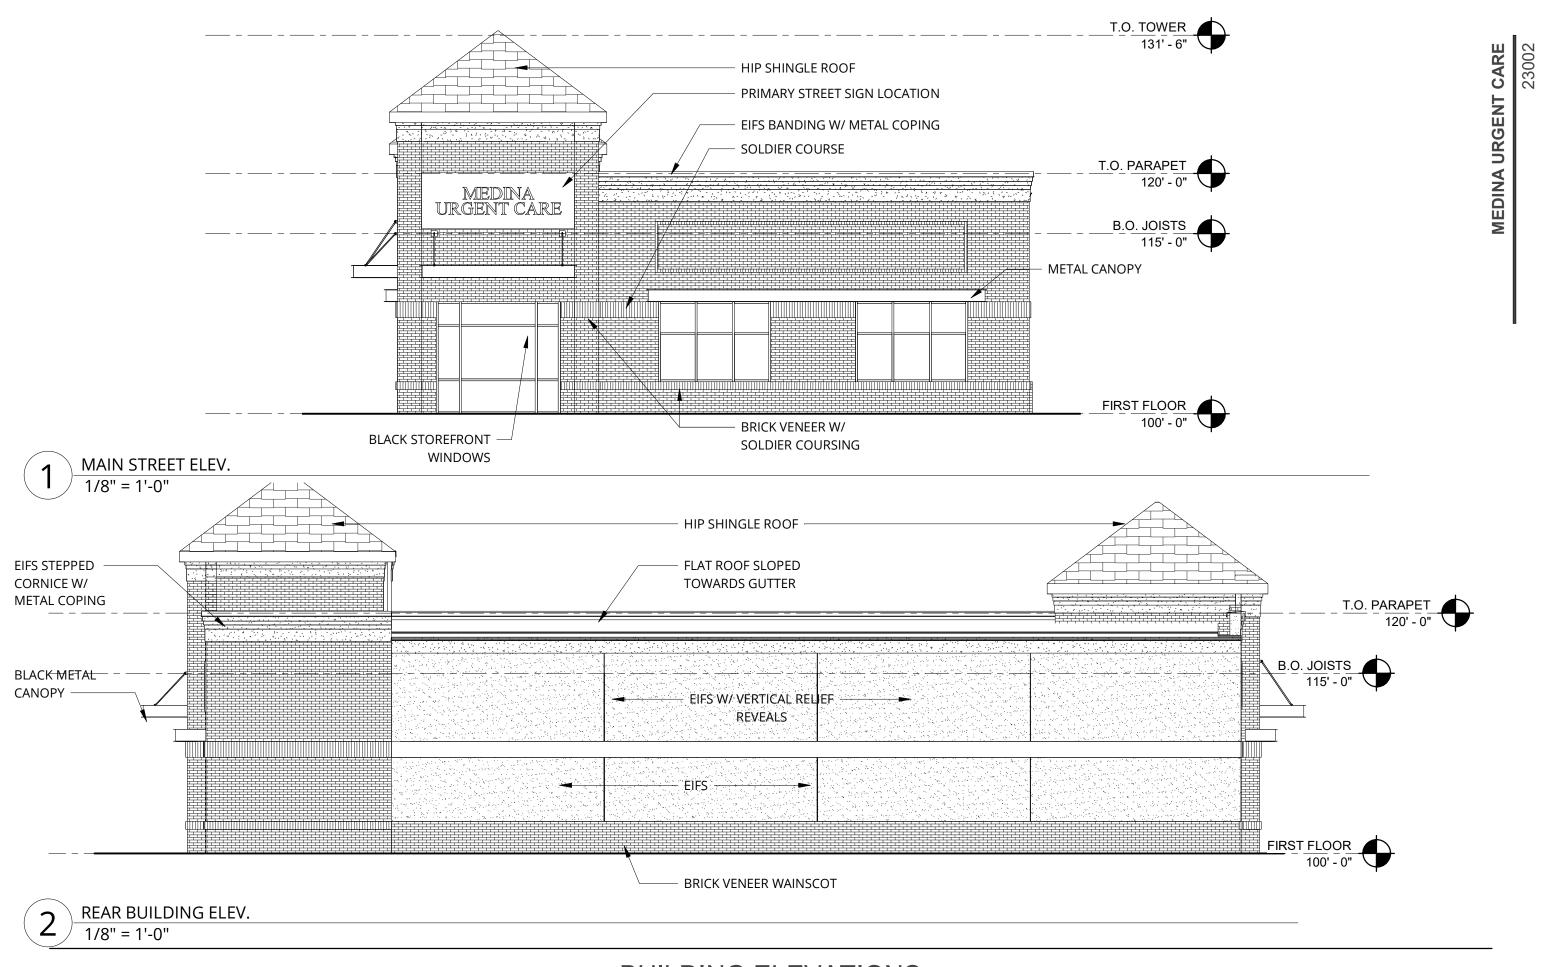








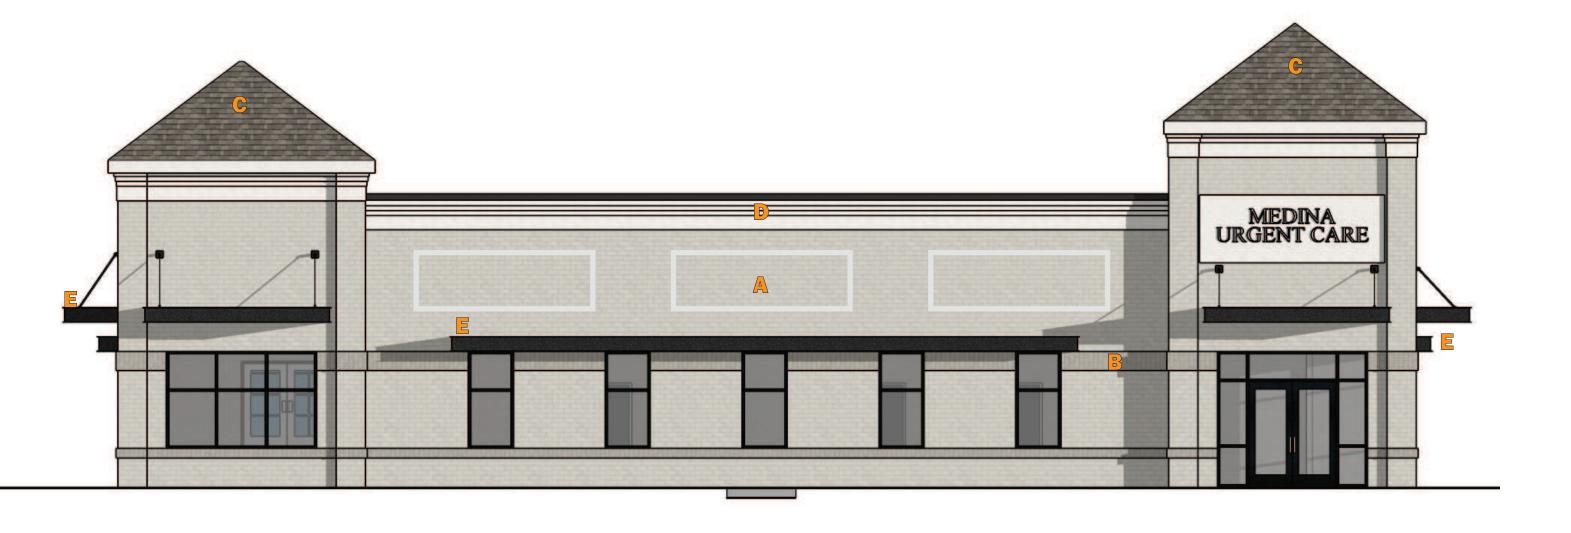





MATERIAL: MODULAR BRICK
PATTERN: SOLDIER COURSE (VARIES)
FINISH: PAINTED SW 7017 DORIAN GRAY



MATERIAL: DIMENSIONAL SHINGLE PATTERN: STANDARD FINISH: TBD




MATERIAL: EIFS BY DRYVIT
PATTERN: SANDPEBBLE
FINISH: PAINTED SW 7004 SNOWBOUND











MATERIAL: MODULAR BRICK
PATTERN: SOLDIER COURSE (VARIES)
FINISH: PAINTED SW 7017 DORIAN GRAY




MATERIAL: DIMENSIONAL SHINGLE PATTERN: STANDARD FINISH: TBD




MATERIAL: EIFS BY DRYVIT
PATTERN: SANDPEBBLE
FINISH: PAINTED SW 7004 SNOWBOUND





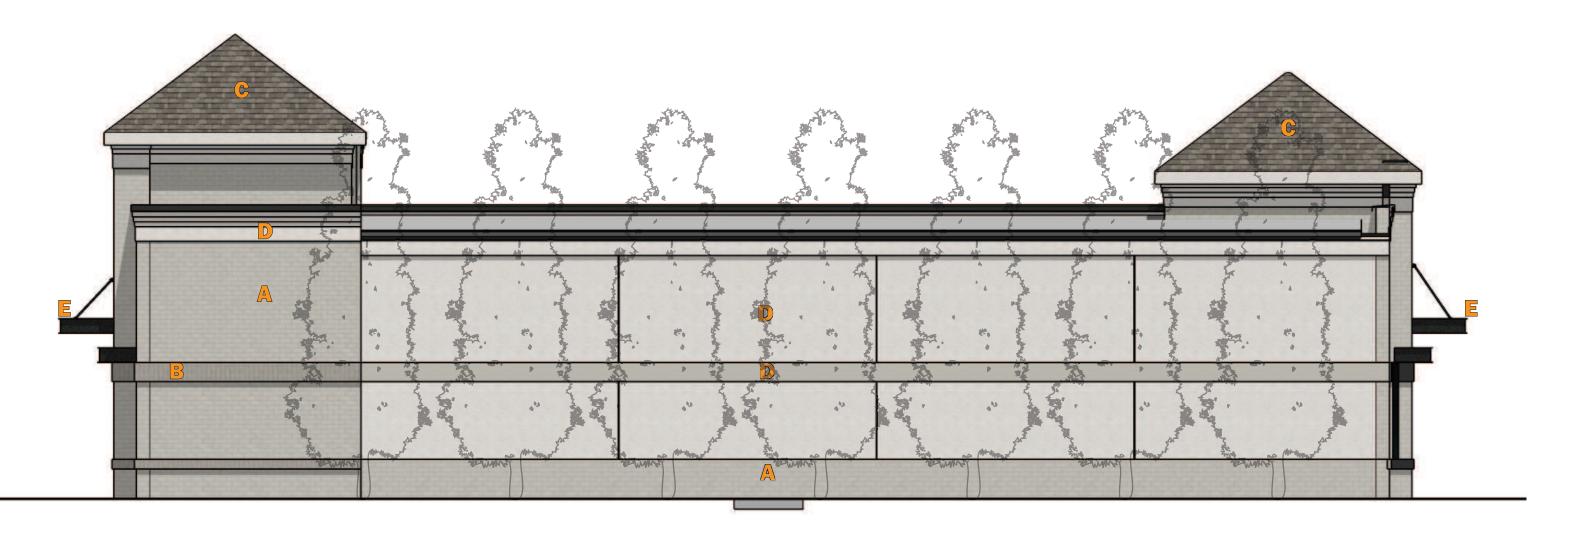





MATERIAL: MODULAR BRICK
PATTERN: SOLDIER COURSE (VARIES)
FINISH: PAINTED SW 7017 DORIAN GRAY



MATERIAL: DIMENSIONAL SHINGLE PATTERN: STANDARD FINISH: TBD



MATERIAL: EIFS BY DRYVIT
PATTERN: SANDPEBBLE
FINISH: PAINTED SW 7004 SNOWBOUND











MATERIAL: MODULAR BRICK
PATTERN: SOLDIER COURSE (VARIES)
FINISH: PAINTED SW 7017 DORIAN GRAY




MATERIAL: DIMENSIONAL SHINGLE PATTERN: STANDARD FINISH: TBD



MATERIAL: EIFS BY DRYVIT
PATTERN: SANDPEBBLE
FINISH: PAINTED SW 7004 SNOWBOUND





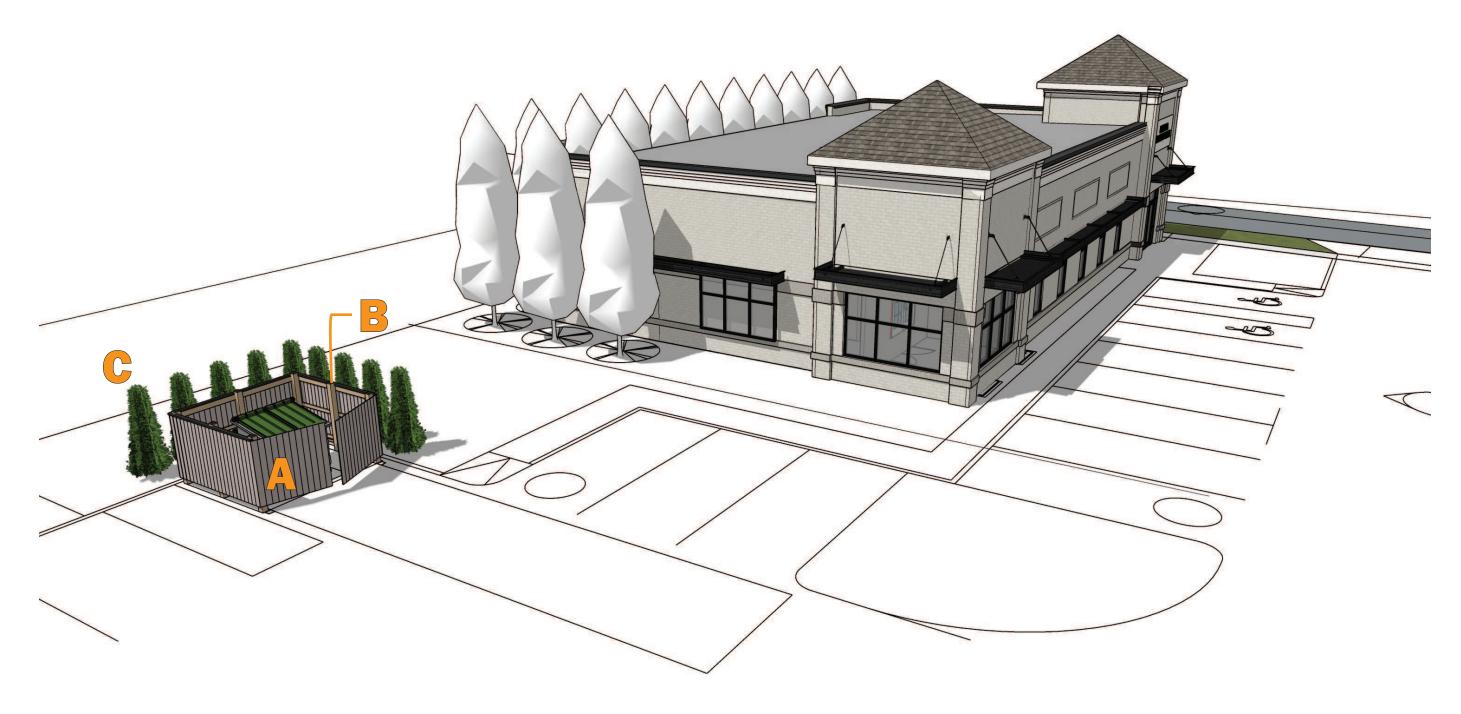



MATERIAL: COMPOSITE WOOD
PATTERN: 1X6
FINISH: ROMAN ANTIQUE (AT) BY
NEW TECH WOOD OR SIM.




MATERIAL: TREATED WOOD POSTS & RAILS
PATTERN: 4X4 POSTS, 1X4 RUNNERS
FINISH: NO. 2 NATURAL (INTERIOR OF ENCLOSURE)

MATERIAL: ARBORVITAE
PATTERN: SPACE 3-4' O.C.; 6' TALL MIN.
FINISH: EMERALD GREEN





INA URGENT CARE GHTING LAYOUT

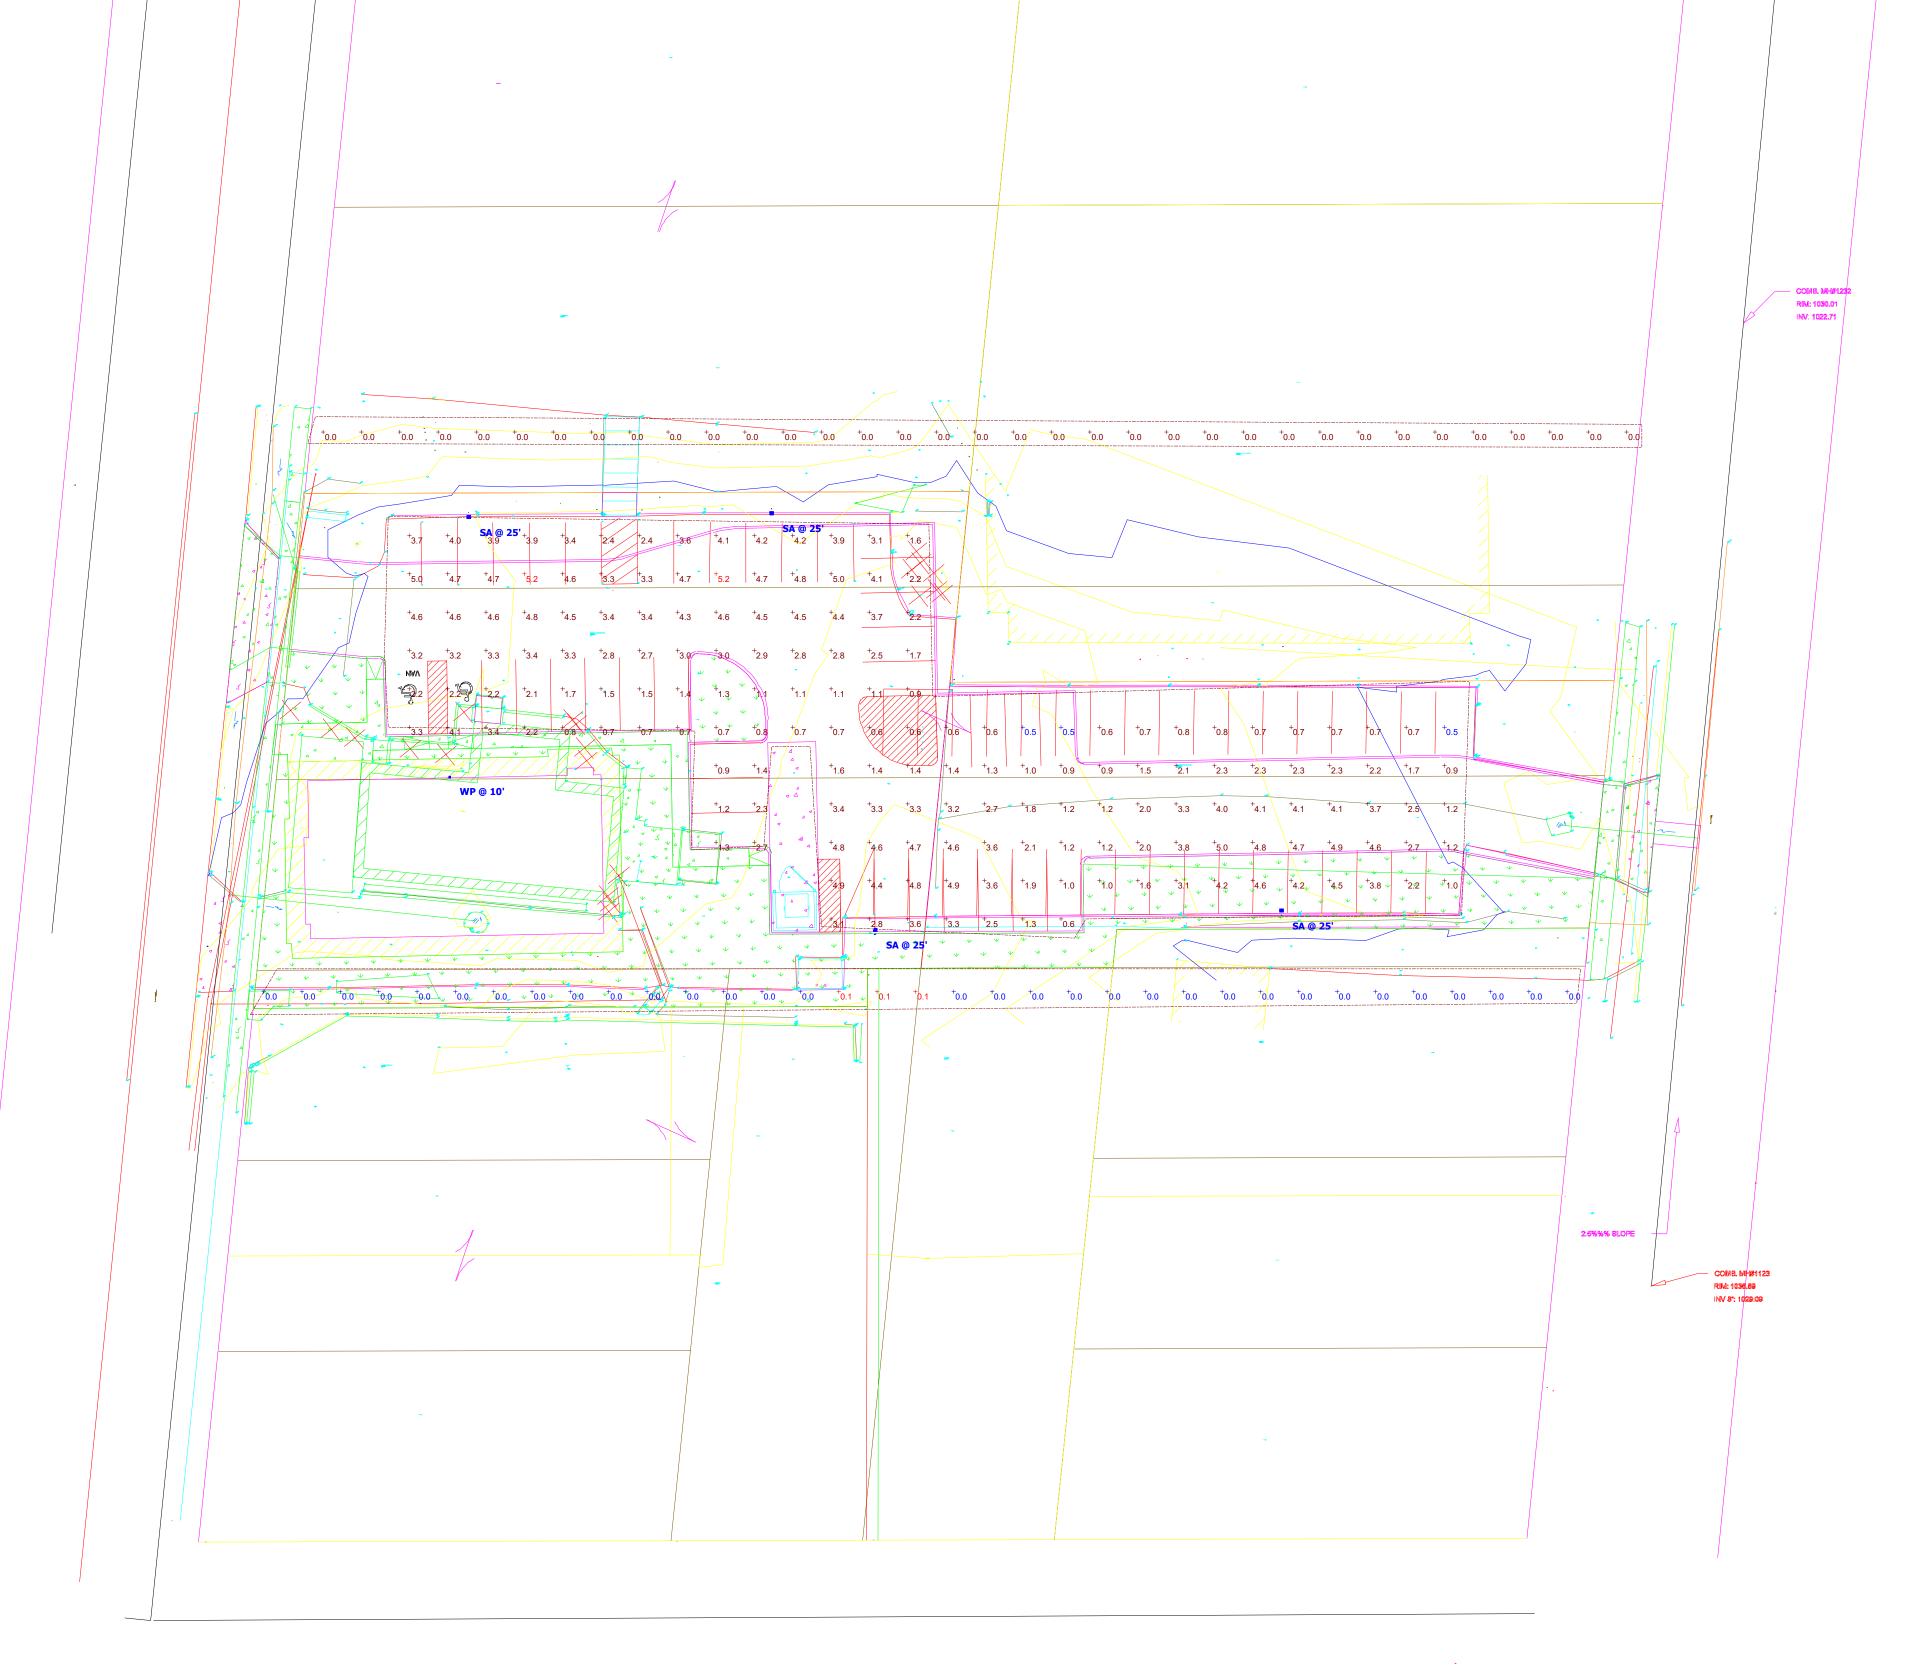

Plan View Scale - 1" = 25ft

Schedule											
Symbol	Label	Image	Quantity	Manufacturer	Catalog Number	Description	Number Lamps	Lumens Per Lamp	Light Loss Factor	Wattage	Plot
	SA		4	LSI INDUSTRIES, INC.	MRS-LED-24L-SIL-FT-30- -70CRI-IL		1	14347	1	196	Max: 13151cd
	WP		1	LSI INDUSTRIES, INC.	XWS-LED-05L-SIL-FT-40 -70CRI		1	5070	1	35	Max: 3236cd

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Calc Zone #1	+	2.7 fc	5.2 fc	0.5 fc	10.4:1	5.4:1

Designer

Date
03/29/2023
Scale
Not to Scale
Drawing No.

Summary



Catalog # :	Project :
9	•••
Prepared By:	Date :

Mirada Small Area (MRS)

Outdoor LED Area Light















OVERVIEW						
Lumen Package	6,000 - 24,000					
Wattage Range	41 - 196					
Efficacy Range (LPW)	112 - 156					
Fixture Weight lbs (kg)	20 (9.1)					

QUICK LINKS

Ordering Guide Performance Photometrics Dimensions

FEATURES & SPECIFICATIONS

Construction

- Rugged die-cast aluminum housing contains factory prewired driver and optical unit. Cast aluminum wiring access door located underneath.
- Fixtures are finished with LSI's DuraGrip* polyester powder coat finishing process.
 The DuraGrip finish withstands extreme weather changes without cracking or peeling. Other standard LSI finishes available. Consult factory.
- Shipping weight: 27 lbs in carton.

Optical System

- State-of-the-Art one piece silicone optic sheet delivers industry leading optical control with an integrated gasket to provide IP66 rated seal.
- Proprietary silicone refractor optics provide exceptional coverage and uniformity in distribution types 2, 3, 5W, and FT.
- Silicone optical material does not yellow or crack with age and provides a typical light transmittance of 93%.
- Zero uplight.
- Available in 5000K, 4000K, and 3000K color temperatures per ANSI C78.377
- Minimum CRI of 70.
- Integral louver (IL) and integral half louver (IH) options available for enhanced backlight control.

Electrical

- High-performance driver features overvoltage, under-voltage, short-circuit and over temperature protection.
- 0-10V dimming (10% 100%) standard.
- Standard Universal Voltage (120-277 VAC) Input 50/60 Hz or optional High Voltage (347-480 VAC).
- L70 Calculated Life: >60k Hours
- Total harmonic distortion: <20%
- Operating temperature: -40°C to +50°C (-40°F to +122°F).
- Power factor: >.90
- Input power stays constant over life.
- Field replaceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).
- High-efficacy LEDs mounted to metal-core circuit board to maximize heat dissipation
- Driver is fully encased in potting material for moisture resistance and complies with FCC standards. Driver and key electronic components can easily be accessed.

Controls

- Optional integral passive infrared Bluetooth™ motion and photocell sensor. Fixtures operate independently and can be commissioned via iOS or Android configuration app.
- LSI's AirLink™ wireless control system options reduce energy and maintenance costs while optimizing light quality 24/7.

Installation

- Designed to mount to square or round poles.
- A single fastener secures the hinged door, underneath the housing and provides quick & easy access to the electrical compartment.
- Included terminal block accepts up to 12 ga.
- Utilizes LSI's traditional B3 drill pattern.

Warranty

 LSI luminaires carry a 5-year limited warranty. Refer to https://www.lsicorp.com/resources/terms-conditions-warranty/ for more information.

Listings

- Listed to UL 1598 and UL 8750.
- Meets Buy American Act requirements.
- IDA compliant; with 3000K color temperature selection.
- Title 24 Compliant; see local ordinance for qualification information.
- Suitable for wet locations.
- IP66 rated Luminaire per IEC 60598-1.
- 3G rated for ANSI C136.31 high vibration applications are qualified.
- IK08 rated luminiare per IEC 66262 mechanical impact code
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.





















Mirada Small Wall Sconce

XWS

The Mirada Wall Sconce's sleek design and wide feature set render it ideal for Commercial & Architectural applications such as Schools, Office Buildings, Strip Malls, Automotive Dealerships, Petroleum Stations, New Construction, Renovations & General Purpose Lighting. Multiple lens options let you choose maximum photometric performance, maximum visual comfort or the ideal blend of both.

The silicone lens (SIL) versions provide high lumens per watt and precision photometric control. The visual comfort (VC) clear and diffuse lens options are available in acrylic or polycarbonate materials and feature a large aperture lens with recessed LEDs to minimize brightness and glare. The polycarbonate lens versions come with an IK10 impact rating and can be ordered with tamper proof hardware for high abuse applications. The Mirada Wall Sconce also has a wide variety of CCT selections, controls and options as well as companion area, post top and bollard products making it the ideal solution for almost any wall mount application.

ASK A QUESTION ▶

Features & Specifications

- Multiple lens options for ideal performance and visual comfort
- Clean, contemporary styling to compliment most building architecture
- Multiple Photometric Distributions
- Battery Backup & Dual Driver Options
- Optional AirLink Bluetooth™ Motion Sensor
- Optional IK10 Impact Rated Polycarbonate Lens
- US & Int'l. patents pending
- 5-year Warranty

MAX LUMENS

8,000

MIN LUMENS

2,000

COLOR TEMPERATURES

2700, 3000, 3500, 4000, 5000

ADDITIONAL OPTIONS

LIFE SAFETY FEATURES











